



## INTERNATIONAL APPLICATION PUBLISHED U.



<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04L 9/32</b>		<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 96/02993</b>
		<b>(43) International Publication Date:</b> 1 February 1996 (01.02.96)	
<b>(21) International Application Number:</b> PCT/US95/09076			<b>(81) Designated States:</b> AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).
<b>(22) International Filing Date:</b> 19 July 1995 (19.07.95)			
<b>(30) Priority Data:</b> 08/277,438 19 July 1994 (19.07.94) US			
<b>(60) Parent Application or Grant</b> <b>(63) Related by Continuation</b> US 08/277,438 (CIP) Filed on 19 July 1994 (19.07.94)			
<b>(71) Applicant (for all designated States except US):</b> BANKERS TRUST COMPANY [US/US]; Four Albany Street, New York, NY 10006 (US).			
<b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> SUDIA, Frank, W. [US/US]; Apartment 4B, 110 East 84th Street, New York, NY 10028 (US). SIRITZKY, Brian [IE/US]; Apartment 2, 11410 Strand Drive, Rockville, MD 20852 (US).			
<b>(74) Agents:</b> LAZAR, Dale, S. et al.; Cushman Darby & Cushman L.L.P., 1100 New York Avenue, N.W., Washington, DC 20005 (US).			
<b>(54) Title:</b> METHOD FOR SECURELY USING DIGITAL SIGNATURES IN A COMMERCIAL CRYPTOGRAPHIC SYSTEM			
<b>(57) Abstract</b> <p>A system for securely using digital signatures in a commercial cryptographic system that allows industry-wide security policy and authorization information to be encoded into the signatures and certificates by employing attribute certificates to enforce policy and authorization requirements. Verification of policy and authorization requirements is enforced in the system by restricting access to public keys to users who have digitally signed and agreed to follow rules of the system. These rules can also ensure that payment is made for public and private key usage. Additionally, users can impose their own rules and policy requirements on transactions in the system.</p>			

J1017 U.S. PTO  
09/918326  
07/30/01

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD FOR SECURELY USING DIGITAL SIGNATURES  
IN A COMMERCIAL CRYPTOGRAPHIC SYSTEM

BACKGROUND OF THE INVENTION

This invention relates to digital signatures. More particularly, this invention relates to the use of digital signatures and certificates for digital signatures in a commercial cryptographic system for enforcing security policies and authorization requirements in a manner that reduces risks to the users.

Public-key cryptography is a modern computer security technology that can support the creation of paperless electronic document systems, providing that the user's digital signature on an electronic document, that is, the user's electronic authentication and verification of the electronic document, can be given sufficient practical and legal meaning. Such paperless electronic document systems, or "document architectures," will encompass not only trading partners operating under standard bilateral contracts but also global multilateral systems in which any entity can, in theory, correspond with any other entity in a legally provable manner, assuming that proper security controls are observed throughout.

These systems will have enormous commercial significance because, in many cases, cost reductions on the order of 10-to-1 can be realized over current paper transaction procedures. This improvement is sufficiently dramatic such that many organizations would, for economic and competitive reasons, be

compelled to use them once their practicality had been demonstrated.

5       No one disputes that paper is a bothersome  
anachronism in the electronic world or that verifying  
pen-and-ink signatures is costly and error-prone. At  
least with paper, however, the signer retains the basic  
"contextual controls" of document preparation and  
physical delivery. On a digitally signed electronic  
document, on the other hand, a signer controls only the  
10       encoded signature. All time, place and manner controls  
are absent, and nothing distinguishes a valid user  
signature from one fraudulently produced by another  
user who somehow obtained the first user's smart card  
and PIN. It would not take too many multi-million or  
15       multi-billion dollar losses to erase all the savings  
produced by this "newfangled" office-automation  
technology. Therefore, digital signatures will see  
early use only in consumer "electronic coin purse"  
applications, where exposure is low, and in wholesale  
20       financial transfers, as to which extremely tight  
security procedures are already the norm. However,  
these uses will have little general commercial impact.

      Thus far, major corporations and banks have  
declined to invest in these technologies due to lack of  
25       well-defined risk models and auditing standards and due  
to uncertainties regarding legal and liability issues.  
Serious investments to commercialize digital signatures  
will occur only after leading national auditing and  
legal experts have ruled that these systems contain  
30       adequate security controls to warrant reliance in  
mainstream intra- and inter-corporate business  
transactions, typically in the \$10,000 to \$10 million  
range. In order for this goal to be achieved, security  
controls must be formulated to reduce the risks of

participants in digital signature document systems to the absolute lowest level technically achievable.

There are two types of cryptographic systems in which digital signatures have been used: symmetric and asymmetric cryptographic systems. FIGURES 1(a) and 1(b) illustrate the use of symmetric and asymmetric algorithms for encryption. In symmetric (conventional) cryptography, as shown in FIGURE 1(a), the sender and recipient of a communication share a secret key 11. This key is used by the sender, the originator of a communication, to encrypt the message 12 and by the recipient of the communication to decrypt the message 13. It may also be used by the recipient to authenticate a message by having the sender use the secret key to compute some function such as a Message Authentication Code (MAC) based upon the message; the recipient thus can be assured of the identity of the originator, because only the sender and the recipient know the secret key used to compute the MAC. DES is an example of a symmetric cryptographic system.

In asymmetric (public key) cryptography, shown in FIGURE 1(b), different keys are used to encrypt and decrypt a message. Each user is associated with a pair of keys. One key 15 (the public key) is publicly known and is used to encrypt messages 17 destined for that user, and the other key 16 (the private key) is known only to that user and is used to decrypt incoming messages 18. Since the public key need not be kept secret, it is no longer necessary to secretly convey a shared encryption key between communicating parties prior to exchanging confidential traffic or authenticating messages. RSA is the most well-known asymmetric algorithm.

A digital signature, however, is a block of data appended to a message data unit, and allows the recipient to prove the origin of the message data unit and to protect it against forgery. Some asymmetric algorithms (for example, RSA) can also provide authentication and non-repudiation through use of digital signatures. In order to sign data, the sender encrypts the data under his own private key. In order to validate the data, the recipient decrypts it with the sender's public key. If the message is successfully decrypted using the sender's public key, the message must originally have been encrypted by the sender, because the sender is the only entity that knows the corresponding private key. Using this method of signing documents, the encrypted message is bound to the signature, because the recipient cannot read the message without decrypting the signature data block. The signature-encrypted message can then be encrypted to the recipient using the recipient's public key, as usual.

Digital signatures may also be formed using asymmetric encryption algorithms as described below and as illustrated in FIGURE 2. To sign a message, the message 20 is first digested (hashed) into a single block 22 using a one-way hash function 21. A one-way hash function has the property that, given the digest, it is computationally infeasible to construct any message that hashes to that value or to find two messages that hash to the same digest. The digest 22 is then encrypted with the user's private key 23, and the result 24 is appended to the encrypted or unencrypted message as its signature 25. The recipient uses the sender's public key 26 to decrypt the signature 25 into the hash digest 22. The recipient

also digests (hashes) the message 20, which has been received either unencrypted or encrypted and then decrypted by the recipient, into a block 27 using the same one-way hash function 21 used by the sender. The  
5     recipient then verifies 28 the sender's signature by checking that the decrypted hash digest 22 is the same as the hashed message digest 27.

Separating the signature from the message in this way, that is, not requiring the sender and recipient to  
10     encrypt and decrypt the entire message in order to verify the signature, greatly reduces the amount of data to be encrypted. This is important because public key algorithms are generally substantially slower than  
15     conventional algorithms, and processing the entire message in order to verify a signature would require a significant amount of time. The signature process also introduces redundancy into the message, which, because the message must hash to the specified digest, allows the recipient to detect unauthorized changes to the  
20     message.

A digital signature provides the security services of (a) integrity, because any modification of the data being signed will result in a different digest and thus a different signature; (b) origin authentication,  
25     because only the holder of the private key corresponding to the public key used for validation of the signature could have signed the message; and (c) non-repudiation, as irrevocable proof to a third party that only the signer, and not the recipient or its  
30     employees, could have created the signature. A symmetric secret key authenticator, for example the X9.9 MAC, does not provide these services, since either of the two parties can create the authenticator using their shared key.

Several of the mechanisms discussed herein assume the ability to attach multiple signatures or cosignatures to a document. A useful format for this purpose, as is well known in the art, is defined in

5 "PKCS #7: Cryptographic Message Syntax," RSA Data Security, Inc., 1993, which is hereby incorporated by reference. Each signature structure on a document will contain an indication of the certificate needed to validate the signature along with a bit string

10 containing the actual signature. Additionally, other information relevant to the particular signer may be included in an individual signature computation. This per-signer information may be included in the signature computation as "signature attributes."

15 In order for one user to identify another user for transmission of a message in a way that ensures the second user's possession of a private key, the first user must be able to obtain the other user's public key from a trusted source. As is well-known in the art, a

20 framework for the use of public key certificates was defined in "X.509: The Directory: Authentication Framework," CCITT, April, 1993 ("X.509"), which is hereby incorporated by reference. These basic public key certificates bind a user's name to a public key and

25 are signed by a trusted issuer called a Certification Authority (CA). Besides containing the user's name and public key, the certificate also contains the issuing CA's name, a serial number and a validity period.

Although X.509 does not impose any particular

30 structure on the CAs, many implementations find it reasonable to impose a hierarchical structure in which each CA (in general) certifies only entities that are subordinate to it. Hence, we can construct a hierarchy of CAs, as shown in FIGURE 3, in which the higher level



CAs 31 (perhaps banks) sign the certificates 34 of the  
CAs 32 beneath them (for example, companies), and the  
lowest level of CAs 32 sign user 33 certificates 35.  
At the top of this hierarchy (not shown) are a  
5 relatively few other root CAs, perhaps one per country,  
that may "cross-certify" each other's public keys (root  
keys).

Various security architectures define mechanisms  
to construct a certification path through the hierarchy  
10 to obtain a given user's certificate and all CA  
certificates necessary to validate it. These  
architectures share the common characteristic that a  
user need trust only one other public key in order to  
obtain and validate any other certificate. The trusted  
15 key may be that of the top-level CA (in a centralized  
trust model) or of the local CA that issued the user's  
certificate (in a decentralized model).

Certificates also contain an expiration date. If  
it is necessary to cancel a certificate prior to its  
20 expiration date, such as if the name association  
becomes invalid or the corresponding private key is  
lost or compromised, the certificate may be added to  
the CA's certificate revocation list (CRL) or "hot  
list." This list is signed by the CA and widely  
25 distributed, possibly as part of the CA's directory  
entry. The certificate remains on the CRL until the  
certificate's expiration date.

Often certain information concerning an entity or  
CA needs to be made available in a trusted manner. In a  
30 secure X.500 Directory, this information would be  
retrieved via standard Directory operations and the  
result would be signed by the Directory. In the  
absence of such a secure X.500 implementation, this  
information is placed in an attribute certificate,

which is signed by a CA in the same manner as the public key certificate. Attribute certificates would be created on presentation of the proper credentials by the user. For example, the user would present his  
5 public key certificate and prove he possesses the corresponding private key, as one form of identification. Attribute certificates are linked to the user's basic public key certificate by referencing the basic certificate's serial number and are revoked  
10 by an identical parallel CRL mechanism. Attribute certificates are discussed further in "X9.30 Part 3: Certificate Management for DSA," ANSI X9F1, June, 1994, and U.S. Patents Nos. 4,868,877, 5,005,200 and 5,214,702, which are all well-known in the art and are  
15 all hereby incorporated by reference.

An attribute certificate is a structure separate from a public key certificate because proper separation of duties may often require that the CA that issues the attribute certificate be different than the CA that  
20 issues the public key certificate. A central CA might rarely of itself possess the required security or authority to "sign for" all of a user's authorizations. Having separate CAs generate various types of attribute certificates distributes risks more appropriately. In  
25 addition, the defined attributes may not be required for all domains, networks or applications. The need for these attributes and for additional domain-specific attributes is determined by each domain.

The user's basic public key certificate remains  
30 X.509 compatible, allowing its use with other applications and allowing use of commercial products for certificate generation.

It is desirable to be able to construct a trusted organization that utilizes digital signature and

certificate mechanisms to enforce a security policy defined by rules within this organizational structure.

5 It is also desirable to use digital signature and certificate mechanisms to encode industry-wide security policy and authorization information into the signatures and certificates in order to permit the verifier of a signature to decide whether to accept the signature or certificate as valid, thus accommodating and easing electronic commerce business transactions.

10 It is further desirable to reduce the risks associated with digital signature systems, particularly with end-user smart cards, by building on this use of public key certificates and attribute certificates.

15 It is further desirable to prevent the use of such a digital signature system by any party that might purport to "accept" a transaction in contravention of the applicable authorization certificates when that party had not signed the applicable "system rules" agreement pertaining to that system of communicating  
20 signer authorization.

#### SUMMARY OF THE INVENTION

25 These and other objects of the invention are accomplished in accordance with the principles of the invention by providing a system for securely using digital signatures in a commercial cryptographic system that allows industry-wide security policy and authorization information to be encoded into the signatures and certificates by employing attribute  
30 certificates to enforce policy and authorization requirements. In addition to value limits, cosignature requirements and document type restrictions that can be placed on transactions, an organization can enforce with respect to any transaction geographical and

temporal controls, age-of-signature limitations, pre-approved counterparty limitations and confirm-to requirements by using attribute certificates for the transacting user. Restrictions on distribution of certificates can be set using attribute certificates. Certificates can be used also to ensure key confinement and non-decryption requirements of smartcards in this system.

10                    BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and advantages of the invention will be apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which the reference characters refer to like parts throughout and in which:

15                    FIGURES 1(a) and 1(b) show the prior art use of symmetric and asymmetric algorithms for encryption;

FIGURE 2 is a flow chart illustrating the prior art process of a digital signature using an asymmetric encryption algorithm;

20                    FIGURE 3 shows a hierarchy of signature certification authorities;

FIGURE 4 shows a directory information tree (DIT);

25                    FIGURE 5 shows an example of an authorization certificate;

FIGURE 6 is a flow chart illustrating the prior art process of verifier enforcement of a transaction monetary value restriction;

30                    FIGURE 7 is a flow chart illustrating the prior art process of verifier enforcement of a transaction cosignature requirement;

FIGURE 8 is a flow chart illustrating the process of verifier enforcement of a transaction document-type restriction;

FIGURE 9 is a flow chart illustrating the process of verifier enforcement of a transaction geographical and temporal control;

5       FIGURE 10 is a flow chart illustrating the process of verifier enforcement of a maximum age of sender's signature restriction;

FIGURE 11 is a flow chart illustrating the process of verifier and sponsor enforcement of a pre-approved counterparty restriction;

10       FIGURE 12 is a flow chart illustrating the process of verifier enforcement of a transaction "confirm-to" requirement;

15       FIGURE 13 is a flow chart illustrating the process of a device's certification of key confinement and non-decryption;

FIGURE 14 is a flow chart illustrating the process of keeping public keys secret and enforcing signing of system rules; and

20       FIGURE 15 is a flow chart illustrating the process of verifying user rules of a transaction.

#### DETAILED DESCRIPTION OF THE INVENTION

25       The following general principles and philosophies are reflected in the signature verification model defined in this invention. First, CA and user certificates can contain attributes that document the conditions and assumptions under which they were created. Verifiers may simply reject all certificates and transactions that do not meet their minimum  
30       standards.

Also, attribute certificates may be signed by a user's "sponsor" to signify that the sponsor's signature will be honored for official business if the transaction meets the requirements stated or implied by

the attributes. Although typically the user's sponsor will be the user's employer, the model can be extended to include the user's bank, credit card issuer, voting bureau, video rental store, public library or any other  
5 entity that might accept the user's signature. This sponsor (authorization) certificate is thus the electronic equivalent of an "affidavit of legal mark," as used in the context of a traditional signature stamp. See Robert Jueneman, "Limiting the Liability of  
10 CAs and Individuals Regarding the Use of Digital Signatures," presented to the ABA Section of Science and Technology Certification Authority Work Group, July 2, 1993.

Furthermore, industries may develop "industry  
15 policy" statements that establish minimum requirements for signature verification. All participants would sign these multilateral agreements in order to ensure that all counterparties would be bound by the encoded restrictions. Normally, sponsor certificates should be  
20 required in all cases, and digital signatures would be deemed otherwise null and void in their absence. Industry-wide policies would also define (1) relevant document types and classes, (2) signer roles and titles, and (3) coded symbols for incorporating by  
25 reference standard contractual terms and conditions.

Moreover, there must be strict adherence to the principle that all restrictions can be enforced in an entirely automated manner (that is, verification "on  
sight"), without reference to paper agreements or human  
30 interpretation, sometimes also termed "fully machineable straight-through processing." In complex and/or high-volume environments, this is required in order to give these security controls credibility in the eyes of audit and legal experts. Reference to

trusted third parties should also be minimized to reduce verification latency times.

5 While these restrictions seem complex, they merely reflect ordinary business procedures made explicit for purposes of machine verification. Formerly, such controls were enforced inside the sponsor's computer systems before sending out the transaction. However, with the advent of multilateral distributed transactions, the verifying user is typically off-line from the sender's sponsor's system, and so the verifier must enforce the sponsor's authorization model, as reflected in the attribute certificates. Once this methodology is specified, office software vendors will develop menu-driven systems to create and manage user attributes, and the cost to user organizations will be relatively low.

#### Organizational Structure in Certificates

20 The certificates themselves may reflect the structure of a sponsor organization. Because many authorization decisions are based on the user's position in an organization, the organizational structure and the user's position therein may be specified as part of a user's name. Names in certificates are specified in terms of the X.500 Directory model, as follows.

25 The X.500 Directory structure is hierarchical; the resulting distributed database comprises the Directory Information Tree (DIT), as shown in FIGURE 4. Each entry 41 is of a specific object class and consists of a set of properties called attributes 42. An attribute 42 consists of a type 43 and one or more values 44. Thus, in an entry of class organization, one attribute is the organizationName; in an entry of class

organizationalPerson, attributes might include title and telephoneNumber.

Each entry also has one or more special attribute values used to construct the object's name; this  
5 attribute value is the relative distinguished name (RDN) of the entry. An object's distinguished name (DN) 45, which is created by concatenating the relative distinguished names 46 of all entries from the DIT root to the entry, uniquely identifies the object in the  
10 global DIT.

Several of the attributes defined in X.500 may be usefully included in the user's attribute certificate. For example, the object class can be used to distinguish between entities (for example users and  
15 roles) whose distinguished names are of the same form. Also, the title may be used in making authorization decisions.

In addition to the use of the DIT to group entities along organizational lines, X.500 defines  
20 several object classes that can be used to construct arbitrary groups of entities. These object classes include the organizational role, whose "role occupant" attribute lists the names of the users who occupy the role, and the group of names, whose "member" attribute  
25 lists the names of group members. To convey this information in a trusted way, one could define role and group certificates that convey the names of the role occupants or group members, respectively, and that are signed by a CA, thus enabling use of this feature  
30 outside the context of an X.500 directory system.

Group and role certificates may be used in conjunction with a cosignature mechanism to simplify the construction of cosignature requirements. For example, a transaction might require the signatures of



three occupants of the "purchasing agent" role. A user may also indicate the role in which he is acting by including the role in the signature computation as a (per-signer) signature attribute. The asserted role  
5 may then be matched against a role certificate (or the user's attribute certificate) during verification.

#### Policy Information in Certificates

It is another embodiment of this invention to  
10 encode information regarding a CA's security policy into the attribute certificates of the CA and its subscribers, so that the verifier of a signature can use the information in determining whether to accept a signature as valid. In general, the CA's certificate  
15 will convey the rules that a CA uses when making certification decisions, while the user's certificate will convey the information used by the CA when applying these rules.

Attributes in CA certificates can indicate  
20 security policy and assurance information for a particular CA. This policy information can also be inherited by subordinate CAs, allowing easy construction of security domains sharing a common policy. Policy attributes in a CA's certificate might,  
25 among others, include:

(1) Liability Limitations: the extent to which a CA is liable in the event of various problems (for example, CA key compromise, defective binding); this might be no liability, full liability or a specific  
30 monetary amount.

(2) Trust Specification: a description of which users and CAs a given CA can certify, expressed relative to the CA itself (for example, "all

subordinates"), or to the DIT in general (for example, "the subtree below Organization ABC"), or to others.

(3) Required Attributes: a list of those attributes in the user's attribute certificates that must be verified against a transaction and/or its context in order for the transaction to be considered authorized. These attributes would be found in the certificate(s) of the sponsor and allow a single authorization certificate to contain authorization attributes for use with multiple applications. Some suggested user authorization attributes are defined later.

(4) Allowable Name Forms: a specification of the allowable name forms that the CA may certify. This information is held as (a) a set of name bindings, which defines the attributes that may be used to name entries of a given object class (that is, the allowable RDN formats for entries of that class), and (b) a set of structure rules, which defines which object classes may be adjacent (that is superior or subordinate) to each other in the DIT, that is, the order in which object classes may be chained together to form a complete DN. This policy attribute may be used to restrict the type of entities that may sign transactions. For example, for wire transfer applications, it might be desirable to restrict signature capability to the organization itself, rather than to users within the organization, since this is similar to the current mode of operation using DES MACs.

(5) Cross-Certificates: it may be desirable from an efficiency point of view to allow certifying entities and as organizations to cross-certify each other in order to constrain the length of certification

paths. On the other hand, it is not desirable to allow certification paths to contain arbitrary numbers of cross certificates, as it is difficult to determine the level of trust in the entity at the other end. Many  
5 certification architectures restrict certification paths to contain only one cross-certificate. To accommodate a wider range of policies, an attribute may be added to the attribute certificate associated with the cross-certificate indicating that the cross-  
10 certifier explicitly allows the use of cross-certificates issued by the CA being cross-certified.

Attributes in a user's or entity's attribute certificate may represent the information verified by the CA when creating the certificate for the entity.  
15 Policy attributes in a user's certificate might, among others, include:

(1) Binding Information: the criteria used to bind the public key to the identity of the entity being  
20 certified. This includes (a) the method of delivery, such as being presented in person, by authorized agent, by mail or by another method; (b) the method of identification, such as by reasonable commercial practices, verified by trusted third party, dual  
25 control, fingerprint check, full background investigation or another method; (c) the identification documents presented to the CA; and (d) the subject's entity type, that is, individual, corporation, device or other.

30 (2) Trusted Third Parties: the names of any trusted third parties or agents involved in the binding process.

(3) Roles: it may be useful for authorization purposes to indicate which roles (both internal and

external to the organization) a user may exercise. This is in contrast to a role certificate, which would be issued to the role and contain the names of all occupants.

5           (4) Relative Identity: a CA may wish to certify only a portion of the DN of an individual. In particular, the CA might disclaim liability for correctness of an individual's personal name, since, under legal Agency principles, the individual's  
10 signature is binding on their organizational sponsor in any event. Consider the name:

C=US; O=Bankers Trust; OU=Global Electronic  
Commerce; CN=Frank Sudia; TI=VP

15 The CA might certify only the validity of the organization, organizational unit and title portions of the individual's distinguished name, all of which are easy to verify, while the personal name would only be "reasonably believed accurate." In view of the relative ease of obtaining false identity papers, this  
20 avoids the need for prohibitively expensive background investigations. Such an identification can be relied on in an ordinary commercial setting but not in a proceeding concerning a will or inheritance, for example.

25           (5) Absolute Identity: we define relative identity as the user's identity "relative" to his organizational sponsor. Put another way, we certify all elements of the user's "business card identity,"  
30 except his personal name. As a special case, some CAs might undertake to certify the absolute identity of selected users, say the children of wealthy clients, diplomats or national security operatives, almost certainly bolstered with biometric techniques. This would be rare and is presented here only for

completeness in order to round out the "relative identity" concept.

Authorization Information in Certificates

5           Attributes may convey restrictions that control the conditions under which a signature is valid. Without such restrictions, the risk of forgery would be considered excessive, since an electronic signature can be affixed to almost any digital document by anyone  
10           possessing the user's smart card and personal identification number (PIN). In the electronic environment, the normal contextual controls of document creation and physical delivery are either weak or nonexistent.

15           Even authentic users are hardly trustworthy to undertake free-form offline commitments, and organizations will thus welcome the capability to positively restrict the scope of express signature authorization. Such authorization attributes might, in  
20           addition to standard X.500 attributes, include Transaction Limits, Cosignature Requirements, Document Types, subject matter restrictions, Authorized Signatories, Geographical and Temporal Controls, Age of Signature, Pre-approved Counterparties, Delegation  
25           Controls, and Confirm-To Requirement. These attributes can be encoded in one or more authorization certificates signed by the signer's organizational sponsor or by an external CA acting on behalf of the organization. An example of an authorization  
30           certificate and an associated transaction is shown in FIGURE 5.

          When a recipient user (verifier) receives a transaction 51 from a sending user, the recipient first uses the sender's basic key certificate 55 to verify

the sender's signature 52 on the transaction 51. As will be described in greater detail below, the recipient also uses the sender's authorization certificate 56, signed by the sender's sponsor 59, to  
5 verify the cosignatures 53 and timestamp notarization 54 appended to the transaction 51 and to verify that the attribute values 57 of the transaction 51 fall within the authorized attribute values 58 as specified in the authorization certificate 56.

10       The user may be subject to transaction limits that control the value of transactions or other documents that the user may initiate. The user's signature will be valid only on transactions originated either up to a certain monetary limit or between two monetary value  
15 boundaries. Accordingly, as shown in FIGURE 6, the sending user sends a transaction 601 signed 603 by the sender (actually by the user's smart card 600 containing his private key) and appends thereto an authorization certificate 604. The verifier uses the  
20 authorization certificate 604 to verify 607 the user's signature 603 and to verify that the transaction monetary value 602 falls within the transaction limit attribute value 605 in the authorization certificate 604. The verifier also verifies 609 the sponsor  
25 signature 606 on the authorization certificate 604 using the sponsor's public key 610. If any of these signatures and attribute values does not verify, the transaction is rejected 611. If verification is complete, the transaction is accepted 612.

30       With regard to cosignature requirements, additional signatures may be required in order for a given signature to be considered valid. Quorum and weighting mechanisms can be used to construct fairly elaborate checks and balances for explicitly governing

the level of trust in each user. The particular sequence or order of required signatures may also be specified. Referring to FIGURE 7, sending user A sends a transaction 702 signed 703 by his own smartcard 700 and, if user B's cosignature is required on the transaction 702, signed 704 by the smartcard of user B 701. Sending user A also appends his own authorization certificate 705 to the transaction 702. The verifier uses the authorization certificate 705 to verify 711 user A's signature 703, and uses the sponsor's public key 713 to verify 712 the sponsor's signature 707 on the authorization certificate 705; if either signature does not verify, the transaction is rejected 720. If a cosignature value 706 is required 714 by the authorization certificate 705, the recipient enforces the requirement by verifying 715 cosigner user B's signature 704 on the transaction 702, and then checks cosigner user B's public key certificate 708 by verifying 716 the signature 709 of the certificate issuer, using the issuer's public key 717. If the signature of either user B or his certificate's issuer does not verify, the transaction is rejected 722.

The use of cosignatures allows an organization to effectively define checks and balances, and to explicitly specify the level of trust in a user. The use of cosignatures also greatly reduces the risks that result from inadvertent compromise of a private key due to theft, misuse or misplacement of a smartcard or PIN. In particular, it is believed that the ability to require cosignatures, value limits and related controls will enable organizations to carefully manage and fine-tune all signature authorizations, thereby giving them all the tools needed to manage and limit their risks. Use of cosignatures further allows distribution of the

authorization function over multiple locations and hardware platforms, with the resultant minimization of risks that might result from access control failures on one of those platforms. See U.S. Patents Nos.

5 4,868,877, 5,005,200 and 5,214,702.

Authorization signatures, which must meet the restrictions specified in the signer's certificate, can also be distinguished from other cosignatures by including the signature purpose as a signature attribute and by requiring that an indication of the signature purpose be included in the data being signed. This signature-purpose attribute might require the values of: (a) an authorization signature appropriate to the document, (b) an authorization cosignature appropriate to the document, where the cosigner's certificate has sufficient authority to authorize the document, and (c) a witness cosignature, where the cosigner's certificate does not by itself have sufficient authority to authorize the document. Signature purpose encodings discussed in draft ANSI standard X12.58 Version 2 (Appendix) issued by the Data Interchange Standards Association (DISA), which is well-known in the art and is hereby incorporated by reference.

25 The user can also be restricted to signing only particular document types, such as ordinary correspondence, purchase orders, specified EDI transaction types, business contracts, specified financial instruments, etc., as defined by industry-wide policies. It may also be desirable for efficiency to exclude certain large classes of transactions and documents. Referring to FIGURE 8, the recipient enforces the document-type restriction in the sender's transaction 801 by first verifying 807 the



sender's signature 803 on the transaction and by then  
verifying 808 the document type attribute value 802  
within the transaction 801 to enforce the document type  
restriction 805 within the sender's authorization  
5 certificate 804. The recipient then verifies the  
authorization certificate 804 by using the sponsor's  
public key 811 to verify 809 the sponsor's signature  
806. If either a signature or the attribute  
restriction does not verify, the transaction is  
10 rejected 810.

It is also desirable to add positive or negative  
restrictions pertaining to transaction subject matter  
or context class. For example, to restrict an agent to  
signing purchase orders for some class of goods (such  
15 as, for example, office supplies), or to deny authority  
as, for example, in the case of denying an agent the  
ability to purchase pornographic materials. Subject  
matter restrictions are enforced by the transaction  
recipient in the same manner as document type  
20 restrictions, and may be implicit in many document  
types, yet requiring separate specification for the  
more generic document types.

An organization can indicate that there are  
specific authorized signatories, that is, that only  
25 specific individuals can "sign for" the organization,  
similar to a standard "corporate resolution" to this  
effect. This might complement the document-type  
concept, as an additional control on signing of  
"corporate" document-types. This restriction can be  
30 implemented by specifying that a cosignature is  
required in which the cosigner's title (in its  
distinguished name) must be equal to one on a specified  
list contained in a authorization certificate. This is

in lieu of naming a list of one or more required cosigners.

Geographical and temporal controls include locations and time periods from which transactions are considered valid. Use of a local trusted "timestamp notary" is assumed. Such a notary would append a trusted timestamp to the originator's signature on a document and would then sign the result. Thus, time-of-day and day-of-week restrictions would normally coincide with the work-week of the user's locale. Also, location information would be associated with the notary so as to restrict access to a specific network segment, typically the user's assigned work area. The "granularity" of location controls would depend on the network architecture. The signer or the signer's computer system must attach a certified timestamp from a specified local server to the transaction, or else the verifier cannot accept the transaction and the signer's sponsor will not be bound by it. As shown in FIGURE 9, the sending user attaches to the transaction 901 an authorization certificate 902, as usual, an authorized timestamp 903 and a time server certificate 904. The recipient verifies 921 the sender's signature 905 on the transaction 901 and verifies 922 the sponsor's signature 908 on the authorization certificate 902. The recipient then (1) verifies 923 that the timestamp transaction text hash 909 matches the result of the text of the transaction 901 hashed with a known hash function, (2) verifies 924 that the time and date 910 on the transaction timestamp 903 fall within the authorized time and date 906 attribute values as specified in the authorization certificate 902, (3) verifies 925 the time server signature 911 on the timestamp 903, and (4) verifies 926 the sponsor's

signature 912 on the time server certificate. If all these conditions are satisfied, the transaction is accepted 931; if not, the transaction is rejected 930.

5           Furthermore, a document may not be valid unless  
the signature is verified within some specified time  
period. For high-value transactions this age-of-  
signature attribute period would be quite short, while  
10           for more normal transactions, especially those sent via  
store-and-forward systems such as X.400, a longer  
interval (such as two days) would be appropriate.  
FIGURE 10 shows enforcement by a recipient of the age-  
of-signature attribute value. The time of verification  
would be provided using a receipt 103 signed by a  
15           trusted timestamp service 104 containing, at a minimum,  
the recipient's name and the signature from the  
original transaction. The verifier must submit a  
timestamped copy of the original signature that is  
dated promptly after the time and date of the original  
20           transaction, or else the sponsor will reject it. As  
shown in FIGURE 10, the recipient (verifier) verifies  
121 the sender's signature 107 on the transaction 101  
and verifies the sponsor's signature 115 on the  
authorization certificate 102. The recipient then  
25           verifies 122 that the difference between the date 105  
and time 106 on the transaction 101 and the date 111  
and time 112 on the timestamp 103 is within the age-of-  
signature attribute restriction 108 in the  
authorization certificate 102. The recipient also  
30           verifies 123 that the hash 110 of the transaction 101  
within the trusted timestamp 103 matches the text of  
the transaction 101. If all these conditions are  
satisfied, the transaction is accepted 130; if not, the  
transaction is rejected 131.

A similar concept is that of a minimum age of a signature. In this case the signature would not be valid until some minimum time after it had been signed. This allows for a smartcard to be reported lost and for  
5 a revocation notice to be broadcast to the recipient. The control attribute can specify a maximum and/or minimum age for the signature . . .

A "pre-approved counterparties" attribute value restricts an entity to dealing only with some specified  
10 set of known trustworthy partners. This is a common requirement in dial-up home banking systems, which typically require that all authorized payees be specified in advance. Another way of stating this is that "free-form transfers" are forbidden. Sponsors  
15 realize that, in case of an error, they stand a better chance of successfully reversing the error when dealing with a large, solvent and creditworthy party than when dealing with a small, unknown and unauthorized one. Separate certificates can be issued for each  
20 counterparty in order to prevent a competitor from obtaining the user's customer list (other than himself) in a single certificate. The approved counterparty can be coded either as a common name, a distinguished name, a certificate number, or the hash value of either the  
25 distinguished name or the counterparty's public key. In order to claim the benefit of the transaction, the verifier must submit a certificate that matches the encoded counterparty value.

FIGURE 11 shows verification by the user's sponsor  
30 of the user's transaction after receipt by a recipient. The recipient (counterparty) verifies 1110 the user's signature 1103 on the transaction 1101 and verifies 1111 the sponsor's signature 1105 on the user authorization certificate 1102. If either of these

signatures does not verify, the transaction 1101 is rejected 1112. If the signatures verify and the transaction is accepted 1113 by the recipient, the recipient endorses the transaction 1101 by issuing his verified transaction 1114 counter-signing 1116 the text 1106 of the original user transaction 1101 and the sending user's signature 1103, with the recipient's certificate 1115 attached. In enforcing the pre-approved counterparty restriction in the sending user's authorization certificate 1102, the sending user's sponsor verifies 1121 the sending user's signature 1103, as included in the recipient's verified transaction 1114, and verifies 1122 the recipient's signature 1116 thereon. If these signatures are verified, the sponsor next verifies 1123 the counterparty public key hash value by hashing the recipient's public key 1117 and checking the result against one of the authorized counterparty public key hash values 1104 as specified in the user's authorization certificate 1102 (the recipient's public key 1117 that the sponsor hashes for verification is itself verified 1124 when the sponsor verifies the recipient's certificate). If these conditions are met, the transaction is accepted 1125.

The attribute values of delegation controls can limit the types and value ranges of authorizations that a CA may specify when issuing an attribute certificate. They can also serve to limit the scope and depth to which a user may delegate his signing authority to others. For example, a root CA might limit an organizational CA to issuing authorizations only to allow its end users to sign documents whose document types fall into a range of documents related to state tax administration. Or a CA might grant some authority

to a user with the provision that it can be delegated only to another person with the rank of assistant treasurer or higher, for a time not to exceed thirty days, and without the right to further subdelegate.

5           Another authorization attribute, called a  
"confirm-to requirement" value, prevents the signature  
from being valid unless the verifier sends a copy of  
the verified transaction to a third party, typically  
10       the user's organizational sponsor or work supervisor,  
at a specified mail or network address, and either (a)  
receives an accept/reject message, or (b) a specified  
time elapses. This requirement is similar to a  
cosignature but occurs after the transaction is sent  
rather than before. Such after-the-fact confirmation  
15       could be acceptable in lower risk situations in which  
few transactions would be rejected and in which  
obtaining the cosignature of the third party in advance  
may be unduly burdensome. Or it might be preferred in  
high-value cases where positive on-line checking is  
20       demanded. In that case, the flow pattern reverts back  
to an on-line rather than an off-line system. As shown  
in FIGURE 12, the recipient first, as usual, verifies  
1211 the sender's signature 1203 on the transaction  
1201 and verifies 1212 the sponsor's signature 1205 on  
25       the user authorization certificate 1202; if either of  
these signatures does not verify the transaction 1201  
is rejected 1213. If the signatures are verified, the  
recipient sends 1214 a confirmation message consisting  
of the original transaction 1201 (the transaction text  
30       1202 and the sending user's signature 1203) to the  
user's sponsor 1215, as specified 1204 in the sender's  
authorization certificate 1202. The recipient should  
receive from the sponsor 1215 the same message in  
return as confirmation 1216, but signed 1205 by the

sponsor. The recipient then verifies 1217 the sponsor's signature 1220 and the confirmation message 1216, and accepts 1219 the transaction 1201.

5 In order to create complex combinations of restrictions, a filter expression, which is a Boolean or logical expression involving one or more attributes, can allow construction of restrictions involving multiple attributes. The attribute assertions are linked with the usual Boolean connectives: "and", "or" 10 and "not". For example, the sponsor might restrict a user to submitting transaction with a type equal to "purchase order" and a value less than \$100,000. Assertions may involve either a single attribute value (equality, less than, greater than, etc.), multiple 15 values of an attribute (subset, superset, etc.), or the presence or absence of an attribute in the document. Of course it will be appreciated that any or any of the described restrictions, as well as others, can be in effect at the same time for the same document or 20 transaction. These restrictions have been discussed and illustrated separately for clarity.

The use of authorization attributes allows a recipient to verify authorization as well as authentication. In such a scenario, the sponsor 25 certificates, anchored by the sponsoring organization's certificate, would be interpreted as authorizing "on sight" the transaction to which they are applied, assuming all specified restrictions are met.

30 A set of basic policies must be defined for use throughout the financial services industry and other industries in order to provide a well-defined, predictable level of service for the verification process. These policies would be agreed to on a multilateral basis by every participating firm and

could stipulate that certain of the restrictions and authorizations discussed in this section would always be deemed to be in effect unless expressly provided otherwise. One of the more important elements of these industry agreements would be the definition and coding of document types. This must be done on a per-industry basis, since the rules will obviously be much different, for instance, for customs inspectors, aircraft inspectors, auditors, tax officials, etc.

Certain authorization attributes may pertain to the specific content of the document itself. This can pose problems for automated machine verification, because the verifier's computer may not always be able to determine the values of such attributes for a given document or transaction. Examples include monetary transaction limits, document types, and security or confidentiality labels. Therefore, it is desirable to provide a standard data block, preferably at the start of the document or the transaction, clearly encoding the attribute, for example the stated monetary transaction value, document type or security sensitivity label. This document tag will be appended by the signer's computer for the convenience of the verifier and as an aid to the verification process. However, in the event of a conflict between the tag and the actual content of the document, the language of the document would be controlling. In the case of structured transactions, such as EDI transactions, in which the document types and monetary values are already completely machine readable, document tags would not be needed.

As a possible convenience in processing simple authorizations, especially where a given user signs many similar transactions, it may often be helpful to



copy the user's public key out of his basic authentication certificate and include it as another attribute in an authorization certificate. This permits the authorization certificate to serve both  
5 purposes (authentication and authorization) and allows the sender to omit the basic authentication certificate from each transaction. In addition, where a device is being relied upon to fulfill a given condition, it may likewise be advantageous to copy the user's device  
10 public key into the authentication or authorization certificate as well, further eliminating the need to send the device certificate with each transaction.

### Third Party Interactions

15 Additional, useful features of digital signatures, beyond those that can be provided using attribute certificates, involve interaction between a signer and third parties of various types.

One such use for digital signatures is electronic notarization. As discussed above, there will be a need to cosign documents using a third party that is trusted to provide an accurate timestamp and/or location information. Simply relying upon signature originators to provide this information in an accurate fashion  
25 leaves signatures vulnerable to fraud based on, for example, pre- or post-dating of documents. An electronic "notary" would be trusted by virtue of its CA's policies to provide this information correctly. The multiple signature capabilities already assumed can be expanded to provide a framework for this service.  
30

For notarization purposes, timestamps and location information will be included as signature attributes. Individual signature structures may either be detached

and stored or, if desired, conveyed separately from the document.

Multiple signatures or joint signatures on the document itself can also be distinguished from  
5 "countersignatures," which are signatures on the signature structure in which they are found and not on the document itself. A countersignature thus provides proof of the order in which signatures were applied. Because a countersignature is itself a signature  
10 structure, it may itself contain countersignatures; this allows construction of arbitrarily long chains of countersignatures. Electronic notarization would then consist of countersigning the originator's signature and including a timestamp within the information being  
15 signed. For very high-risk applications it may also be desirable to require multiple signatures on each certificate by one or more CAs, with the signatures being performed in independent cryptographic facilities and with different private keys.

20 Various levels of service can be defined for electronic notaries based on the level of data verification performed prior to signing (ranging from mere existence of the document, in which case notarization may be completely automatic, to human  
25 verification of document content) and based on data retention and audit capabilities.

Another use for digital signatures is for delegation or "power of attorney" certificates. Because users are often tempted to entrust their  
30 devices or smartcards to others, for example, secretaries or co-workers, when the users go on vacation, the frequent situation, in which one user obtains another user's smartcard and PIN, exposes the smartcard to possible misuse. The system therefore

facilitates the issuance of power of attorney certificates that allow a delegate to associate the signature of his own smartcard with the authority of the delegating user. The power of attorney certificate  
5 would include at a minimum the name of the delegator, identification of the delegate's public key certificate and a short validity period, and would be signed by the delegator. Another possibility is for the delegate to create a new key pair exclusively for use with the  
10 delegator's signature, with the new public key included in the power of attorney certificate. This would eliminate any potential confusion between use of the delegate's private key on behalf of the delegator and on his own behalf.

15 The problem of handing over smart cards can be greatly reduced by providing a workable alternative that preserves the principle of individual accountability. Wide implementation of this feature will make practical the disallowance of smartcard  
20 loans, a highly desirable goal.

The use of delegation certificates discussed above implies that the user is acting as a CA. In some cases, particularly those in which the transaction crosses organizational boundaries, there may be concern  
25 that the level of controls and auditing available with the individual user's cryptographic device (for example, a smart card) is not sufficient. In such cases, delegation certificates could be issued by a CA upon request of the delegator as normal authorization  
30 certificates. This also allows the delegation certificates to be revoked using the standard CRL mechanism. Users' certificates might then indicate a list of possible delegates, and the delegation

certificate itself would contain an attribute naming the delegator.

In exercising the power of attorney, a user may indicate that he is signing for another user by including in the document or transaction a "signing-for" signature attribute, that is, the name of the user being signed for. There must be a valid delegation certificate authorizing the signer to act for the user being signed for. Delegation is also useful in connection with a cryptographic module in a user's personal computer. Hashing and signing a document should ideally be a unitary operation in order to prevent substitution of a false hash via software hacking. However, the typical smartcard lacks the computing power to hash a very long document. One solution is to let the smartcard delegate this function to the cryptographic module using a very short-lived delegation certificate valid for only a few minutes. This certificate is signed by the user's smart card and indicates that the user of the smart card has allowed the delegation. See, for example: Gasser, M., A. Goldstein, C. Kaufman and B. Lampson, "The Digital Distributed System Security Architecture," Proceedings of the 12th National Computer Security Conference, 1989; Gasser, M. and E. McDermott, "An Architecture for Practical Delegation in a Distributed System," Proceedings of the 1990 IEEE Symposium on Security and Privacy.

### 30 Non-Public Public Key

A more basic problem, however, is ensuring that all possible recipients will actually employ the certificate- and attribute-verification methods described above. Although these methods allow

sponsoring organizations to protect themselves, their users and those with whom they transact from liability based upon falsified transactions by allowing them to verify the identity and qualifications of those with whom they transact and the characteristics of the transactions prior to transacting, there is no guarantee that all recipients will actually so verify. If a recipient acts upon a transaction without first verifying the attributes of both the sender and the transaction, and if the sender is later found to have sent a fraudulent or unauthorized transaction, the recipient could then claim liability from the sender or its sponsor by claiming that the recipient was unaware of any requirement for authorization verification of the user's basic signature. One way to ensure that sponsors and other entities are protected from liability in such a situation is to require that the signer include the hash value of each of his identity and authority certificates as attributes within his signature. This can prevent a verifier from claiming that he was unaware of such certificates and of the restrictions they impose. However, the signer might (intentionally or unintentionally) omit to do this. Another more emphatic way to ensure verifier compliance is to prevent the root key, the public key of the ultimate authority, that is, the highest-level certifying authority, which key would-be verifiers will need in order to verify any part of a transaction, from being distributed to a user (or to the user's device or smartcard) unless the user contracts with the cryptographic system and agrees to verify all parties and all transactions in accordance with the preestablished rules. In this way, the users are not technically forced to verify all parts of their

transactions. However, not verifying their transactions in full would violate the contract between the users and the cryptographic system and would thereby absolve all other parties to the cryptographic system, for example a sponsor whose employee acted without authority, from liability. The non-verifying recipient would then bear all the risks of such an unverified transaction himself. Furthermore, because the root key of the system authority is considered a trade secret, no one who has not signed the system rules agreement may possess a copy of it, and no one could claim to have verified any part of the transaction. This would make it far more difficult for the "outside" verifier to claim that he had incurred a loss by "reasonably relying" on the transaction, even if it was in fact valid. This art of keeping the system root key as a trade secret lends particular force and effectiveness to all the restriction and authorization methods described herein. It is believed that the possibility of incurring the potentially-large liability for valuable transactions will persuade users to employ the methods of attribute verification of this invention.

25     Restrictions on Certificate Distribution

Users and organizations must be able to restrict the distribution of all types of certificates for a number of reasons. First, the certificates often contain confidential business information that the user or organization prefers not be shared with others and that is nevertheless being shared with the verifier through the certificate, albeit only for the limited purpose of signature verification. Also, users' basic privacy rights may be violated if their public keys and

network addresses are published. For example, they may be flooded with unsolicited business proposals and advertisements once their public keys are disseminated. Furthermore, the organization may have a general policy against giving out user identification numbers and public keys, because they may be used as starting points for various types of security attacks.

This functionality may be implemented as an attribute in user's certificate. If the "distribution-restriction" attribute is TRUE, the user/issuer grants permission to use the certificate (which could be an authority or a public key certificate) only for signature verification; distribution or further publication is prohibited. Other ways to specify this restriction might include placing the attribute in the organization's certificate, publishing the restriction as part of the industry-specific policy, or (in a true X.500 implementation) using the X.500 access control list mechanism to restrict access to the certificate. Although some existing general legal basis for enforcing this restriction might be found under copyright law, that is, if the certificate is declared as an unpublished work for which a license is granted only to the named verifier, a firmer legal basis will still be desirable.

#### Smartcard Requirements

There are some additional requirements on smartcards when used with commercial digital signature systems.

The first requirement is private key confinement and self-certification. That is, the user's private signature key must never be allowed to leave the smart card. Only in this way can it be assured that theft of

the key cannot be accomplished through purely electronic means without leaving any evidence. This principle of private key confinement is vital to the concept of non-repudiation.

5           Thus, as illustrated in FIGURE 13, when providing a public key 1303 to be certified, the card 1301 must attest that the card 1301 is tamperproof and possesses a key confining design. Proof can be provided via a "device certificate" 1302 stating that the card  
10           originates from the specific manufacturer or product line. The public key 1308 of the device 1301 must then be certified by the manufacturer or by a CA designated by the manufacturer. One likely approach to creating this device certificate would be to generate the device  
15           key pair during fabrication of the smartcard so that the corresponding device certificate 1302 could also be included on the card. The device certificate 1302 certifies the properties 1304 of the card, and the card generates a key pair 1303,1309 which is to be used by  
20           the user of the card and which the user can have certified as his own by any appropriate desired CA. Then, when submitting a newly generated public key 1303 for certification, the device private signature key 1305 would be used to countersign 1306 the certificate  
25           request data 1307, which is already signed by the newly-generated user private key 1309.

          Also, in a case in which the government requires that all decryption keys be escrowed, the card should be able to certify that it is incapable of decryption.  
30           This "signature only" certification can be implemented through the same mechanisms described above, thus allowing the user's signature key to remain exempt from escrow requirements. Because it is doubtful whether an escrowed key retains any value for non-repudiation



services, this certification is vital in order to prevent the signature key's disclosure through possible mishandling during an escrow process.

Smartcards should also be required to guard  
5 against unauthorized use of personal identification  
numbers (PINs). Normally, a smartcard is protected  
against unauthorized use by a PIN, the equivalent of a  
password. Typically, a PIN is changeable only by the  
10 user and must be a specified length, but typically  
nothing prevents the user from setting the PIN to a  
trivial number, for example all 1's or 121212.  
Smartcard vendors should be requested to implement PIN-  
change routines that insure non-trivial PINs without  
repeating digits or obvious patterns. Making the PIN  
15 relatively long (at least 6 digits) and non-trivial  
reduces the chance that the card can be operated by  
someone finding or stealing it. Support for a 6-digit  
PIN requirement can be found in "X9.26: Financial  
Institution Sign-On Authentication for Wholesale  
20 Financial Transactions", ANSI, 1990, which is well-  
known in the art and is hereby incorporated by  
reference and which sets forth the "one-in-a-million"  
standard that states that a log-in mechanism may be  
considered secure if, among other things, an attacker  
25 has no more than a one-in-a-million chance of guessing  
the correct password and if the system takes evasive  
action to prevent repeated guessing. Furthermore,  
smartcards should be required to take "evasive action",  
for example, shutting down for a period of time or even  
30 erasing private keys, if too many incorrect PINs are  
entered by an unauthorized user.

It could also be made a requirement that smartcard  
manufacturers use biometrics as more secure methods of  
identification. Extensive work is currently being done

in the areas of voiceprint and fingerprint identification, as a supplement to PINs. However, while the rates of false positive and negative still must be reduced, the main problem lies in securing the biometric input device and its data channel so that they are immune to capture and replay of the biometric data. This is not a problem when the biometric device is embedded in a concrete wall, for example in an ATM or door access system, but it remains a serious problem in typical commercial office settings. Ideally, the card and biometric input device will each be tamperproof cryptographic modules that can certify themselves and establish secure channels with each other.

Smartcards should also be able to maintain an "audit trail," or an internal log of recent actions, containing at a minimum, a timestamp, transaction amount, type code and message digest. This information can be compressed into 40 or so bytes so that a 400-record circular log would consume around 16K bytes. This log would be uploaded and checked only on receipt of a signed request from the card issuer over a secure channel. Also, the card would not delete the old log until it received a signed confirmation from the issuer stating that the uploaded log had been received intact. This control mechanism will deter forgery, reduce the damage that can be caused by a forger, and allow unauthorized or questioned transactions to be investigated more quickly and easily. Since most or all transactions occur off-line from the issuer, the card is the best witness of its own actions.

Controlling Access to the Public Key of the Root  
Certifying Authority and Cost Recovery

As shown in FIGURE 3, in a particular cryptographic system, there may be a hierarchy of certifying authorities (31-33) issuing certificates 34, 35. In a larger system the number of certifying authorities and the depth of the hierarchy would be much greater. In the structure shown in FIGURE 3 the certifying authority A (31) is the root certifying authority, with all other certifying authorities being below it. As noted in the description of FIGURE 3, the public key of certifying authority A is well known. In a system where certifying authority A accepts liability for any transactions in the system based on information in certificates issued by A, it would be useful and desirable for certifying authority A (the root certifying authority) to control access to its public key. By doing so, certifying authority A could enforce rules on the system which would ensure the well-being of the structure of the system. Various methods for controlling access to the public key of a certifying authority are now described.

With reference to FIGURE 14, in a cryptographic system, a certifying authority (CA) 1402 issues user identity certificates 1404 to users (for example, user 1438) of the cryptographic system. Certifying authority 1402 has a private key 1406 and a public key 1408. The private key 1406 is used to digitally sign the certificates 1404 with certifying authority's digital signature 1410. Certifying authority 1402 may be any certifying authority in a hierarchy of certifying authorities, such as, for example, that shown in FIGURE 3.

Certifying authority 1402 determines information about users of the system, and, based on that

information, issues the certificates 1404 to those users. A certificate 1404 issued by certifying authority 1402 to a user 1438 contains user information 1410 including the user's public key 1412 and  
5 certifying authority's policy information 1414 regarding that user. In order for the information contained in the certificates 1404 to be verified by other users of the system, these other users must have access to the public key 1408 of the certifying  
10 authority 1402.

Effectively, certificates 1404 issued by certifying authorities are used by users of the system to identify themselves to other users of the system so as to facilitate transactions within the system. A  
15 recipient (a system user) receiving a transaction 1440 from another system user 1438, where the transaction is accompanied by a certificate 1404 issued by certifying authority 1402 can rely on information in the certificate 1404, essentially because the certifying  
20 authority 1402 which issued the certificate 1404 vouches for the information in the certificate and accepts liability for certain transactions which rely on information in the certificate. If the certificate 1404 includes policy information 1414 of the certifying  
25 authority, this liability is only accepted by the certifying authority 1402 if the recipient had a valid copy of the certifying authority's public key 1406 and if the recipient followed the policy 1414 described in the certificate 1404.

30 Thus, for example, suppose that after verifying to its satisfaction the identity of user A (1438), certifying authority 1402 issued a certificate 1404 to user A (1438). The certificate includes the public key 1416 of user A (1438), a policy 1414 of certifying

authority 1402 with respect to user A and is digitally signed by certifying authority 1402. Suppose, for example, that the policy 1414 in the certificate specified that user A can only enter into transactions on weekdays from nine in the morning to five in the afternoon. A recipient 1424 of a transaction 1440 by user A 1438 and the certificate 1404, can perform the transaction with the knowledge that certifying authority 1402 would accept liability for the transaction if (a) the recipient verified the policy 1414 for the transaction, that is, if the recipient verifies that the transaction is taking place within the allowed time bounds, and (b) the recipient had a valid copy of the public key 1408 of the certifying authority 1402. In other words, if the recipient does not check the transaction with respect to the policy then the transaction is invalid. Further, even if a recipient checks the transaction from user A and the transaction is allowed by the policy of the certifying authority with respect to user A (as specified in the certificate), the certifying authority 1402 is not liable for the transaction if the recipient was not in possession of a valid copy of the certifying authority's public key 1408.

25       The cryptographic system also includes various sponsors 1418 who also issue certificates to users. These sponsor-issued certificates are also known as authorization certificates 1420. These certificates 1420 function, inter alia, to specify the rules or policies 1422 of the sponsor issuing them. These authorization certificates 1420 can be separate and different from the identity certificates 1404 issued by the certifying authorities (even though the identity certificates may contain policy requirements of the

certifying authorities). A user may have only one identity certificate 1404 issued by a certifying authority 1402. However, a user may have numerous authorization certificates 1420 issued by one or more sponsors 1418.

When a recipient receives a transaction from another user of the system, the recipient should also verify all sponsor policies included in authorization certificates included with the transaction from that user. Thus, in this cryptographic system, users are required to enforce the rules (policies) of the certifying authorities and sponsors in the system.

As noted above, in order for the information contained in the various certificates to be verified by users of the system, these users must have access to the public key 1408 of the certifying authority 1402 or sponsor 1418 that issued the various certificates. In order to enforce the rules of each certifying authority and sponsor in the system it is necessary to limit the access to the public key 1408 of some of the certifying authorities. In particular, it is necessary to limit access to the public key of the topmost (root) certifying authority 1402.

Accordingly, the root certifying authority 1402 keeps its public key a trade secret, and in order to obtain the public key of the root certifying authority 1402, a user (potential recipient) 1424 wishing to undertake transactions in the system must obtain the certifying authority rules 1426 issued by the root certifying authority. Recipient 1424 must hash these rules to form hashed rules 1428 which it must then digitally sign to produce a signed copy of the hashed rules 1430. This digitally signed copy of the hashed rules must be returned to the root certifying authority

1402. By these actions, the recipient 1424 agrees to abide by the rules of the certifying authority 1402 which it has just signed. The root certifying authority 1402 may also require that the recipient 1424  
5 also obtain, sign and return rules from other certifying authorities in the system as well as from sponsors in the system. For example, recipient 1424 may also be required to obtain sponsor rules 1432 from sponsor 1418 and return a signed copy of these rules  
10 1434 to the sponsor 1418.

Once the root certifying authority 1402 is satisfied that it has received a valid copy of the system rules signed by the recipient 1424, the root certifying authority issues its public key 1408 to the  
15 recipient 1424.

The root certifying authority public key 1424 may be issued to a recipient in a number of ways. In preferred embodiments the recipient is provided with a secure device 1436, for example, a smartcard. In one  
20 preferred embodiment the certifying authority public key 1408 is immediately available in the secure device, so that once the recipient 1424 obtains the device, he has the root certifying authority public key 1408. In another preferred embodiment, the certifying authority  
25 public key 1408 is in the device 1436 in a disabled form, and the root certifying authority 1402 enables the key 1408 in the device upon receipt and verification of the signed rules 1430.

In some cases it is useful for the root certifying  
30 authority public key 1406 in device 1436 to expire or to become inaccessible after a certain time period. In these cases, in order for the root certifying authority to reactivate the key 1406, the recipient 1424 must again obtain, sign and return the rules of the root

certifying authority 1402. These rules may be different from the rules previously signed.

5 Different certifying authorities, including the root, may also require that other conditions be met by potential recipients before they are given access to the public keys of those certifying authorities. However, included in the system rules is an agreement by anyone signing the rules to keep them a secret.

10 Cost Recovery

The rules can also include agreement to pay for use of the system. Thus, when a user obtains a valid key (by agreeing to follow the rules of the root CA of the system), these rules can enforce agreement to  
15 comply with the payment scheme of the system.

A cryptographic system can link the operation of the system with associated payment by users of the system for the transactions they perform and accept. The payment for a transaction is made, for example, in  
20 the form of a pre-paid account, an agreement to be billed, or a contemporaneous payment of digital cash to various parties in the system. For example, a particular operations such as digitally signing a transaction may cost a user a certain amount to be paid  
25 to the certifying authority which issued the certificate which guarantees that user's identity.

Some digital payment functions can be built into the devices containing the public keys. Since user's private keys are typically kept in secure devices (for  
30 example, smartcards), the secure devices can be used to maintain a current digital balance for each user. This digital balance can be a debit or a credit amount. Every time a user digitally signs a transaction using his secure device, a certain amount is deducted from



that user's digital balance. If the secure device is a debit device, then when the user's digital balance reaches zero the device would become disabled and no longer able to sign for the user. The user would then  
5 have to obtain further digital credit from a certifying authority or some other sponsor in the system. If, on the other hand, the secure device is a credit device, then the user might be required to perform a payment transaction to the certifying authority at certain  
10 regular intervals, for example, daily, weekly or monthly. Since the digital credit amount is available from the secure device, the certifying authority could be assured that the transaction is for the correct amount. A user who does not perform the required  
15 payment transaction would be listed in a CRL as being suspended or revoked and would no longer be able to perform transactions in the system.

Digital payment on a per transaction basis is also achieved using a confirm-to transaction. The user's  
20 authorization certificate would list the confirm-to address of the payee. Once the transaction occurs the payee is notified and can deduct payment from the user's account.

25 Price Information

Since a user has agreed to pay fees and royalties associated with the system, the user can also be provided with flexible pricing and billing information.

User-specific pricing policies can be implemented  
30 using certificates. Certificates issued by sponsors and certifying authorities can include payment and pricing policies for particular users. For example, a certificate might include a list of prices for certain transactions (including, for example, signing using a

particular private key, verifying using a particular public key, or checking the revocation status of a particular certificate), a discount rate for particular users, a discount rate for transactions with certain recipients, and rates for bulk transactions. Some of the billing is performed by the secure devices of the users whereas other billable events can arise from actions performed by recipients of transactions.

In order to implement certain pricing policies, a certificate may contain various digital fields. For some policies, these fields include a revocation service address, a revocation service fee, and a transaction confirmation fee. The revocation service address is similar to the confirm-to address, but is used only to confirm the validity of the certificates. That is, the revocation service screens for attempted transactions based on certificates that have been withdrawn. The Revocation Service Fee is the fee charged for this service.

Examples of these fields are:

- (a) Private\_Key\_Signing\_Fee = \$0.50
- (b) Public\_Key\_Verify\_Fee = \$0.50
- (c) Revocation\_Service\_Address =  
rev-check@btec.com

- (d) Revocation\_Service\_Fee = \$0.50
- (e) Confirm\_Service\_Fee = \$0.50

All fees can be stated as flat fees or as a fee per some amount of base transaction amount. For example, a fee can be specified as "\$0.50" or as "\$0.50 per \$1,000 of base transaction amount".

Given the above examples, a recipient receiving a transaction could send the associated certificates to the revocation service address and would be billed at the rate specified by the service fee.

In order to charge for a confirm-to transaction, a certificate can also contain a transaction confirmation fee, for example,

Transaction\_Confirmation\_Fee =  
5 (\$0.50 per  
\$1000  
transaction  
amount)

10 In this case each confirmed transaction would cost the recipient the appropriate fee.

In some instances a recipient may receive a transaction that is too expensive and which it would therefore reject. Accordingly, a digital field indicating permission to bill the sender, the field  
15 being signed by the sender, is also included. This field could include the sender's account number and other information including a maximum acceptable billing rate etc. This "bill-sender" field would appear as an attribute in the sender's signature block.

20

#### Intellectual Property Licensing

The rules may also include agreement to pay for all intellectual property used by a user. For example, a system may offer a user patented transactions,  
25 services or algorithms, copyrighted materials, and the like. In order to a user to obtain a public key that would enable access to this intellectual property, the user must sign the user rules agreeing to pay for use of the property.

30

For example, in one embodiment, the secure device contains many un-activated services (for which payment is required). Each use of one of these services requires payment in the form, for example, of digital cash, either by an internal transaction in the device

or by some transaction with another user of the system. In order to obtain the device, the user must digitally sign a set of rules (using a private key in the device and unique to the device and therefore the user). By  
5 signing these rules, the user agrees to make the payments as required.

#### Signer Imposed Policies and Rules

A user of a cryptographic system may have an  
10 identification certificate (issued by a CA) and one or more authorization certificates (issued by CAs or sponsors of that user). Each of these certificates has policies of the issuing party, and a recipient of a transaction including any of these certificates is  
15 expected to verify that the transaction obeys all the rules specified in the certificates. It may be the case, however, that for a particular transaction, a user wishes to have more restrictive rules applied than are allowed by the certificates. For example, a user  
20 may be allowed to approve all transactions of \$1 million or less, but may wish to approve a certain transaction only if its value is less than \$1,000. Alternatively, a user may be allowed to approve certain transactions alone, but for a specific transaction the  
25 user may wish to require one or more co-signers. In support of this feature, the cryptographic system of the present invention provides users with the ability to add user rules, attributes and restrictions to transactions.

30 The user rules cannot permit transactions to be approved that would not otherwise be allowed. Therefore a recipient must always apply the most restrictive rules to every transaction. For example, if a user's certificate allows transactions up to

\$1,000 and the user rules specified transaction values of up to \$1 million, clearly the \$1,000 limit should apply. This can be achieved, for example, by the recipient applying all of the certificate rules first and then, if the transaction is still valid, applying all of the user rules. Applying the user rules first and then the certificate rules will also produce a correct result. However, since boolean combinations of rules and restrictions are supported, interleaving the user and certificate rules may produce an incorrect result if not carefully performed.

FIGURE 15 shows verification of a user transaction which includes user-supplied rules. A user transaction 1502 includes transaction text 1506 describing the transaction to be performed by a recipient. The user appends to the transaction text 1506 a set of user-supplied rules 1504 which the user wants verified by any recipient of the transaction 1502. Then the user digitally signs the combination of the transaction text 1506 and the rules 1504 to form the transaction 1502, forming a user signature 1510 which is appended to the transaction.

The transaction 1506 is then sent, along with any required sponsor and/or CA certificates, for example, with CA certificate 1508 and sponsor certificate 1509, to a recipient who must then verify the transaction. To do this, the recipient verifies 1512 the user's signature 1510 using the user's public key 1514 from the CA certificate 1508. If the user's signature is accepted, verification continues, otherwise the transaction is rejected 1514. If verification continues, the recipient verifies 1516 the CA's signature 1518 using the CA's public key 1520. If the CA's signature is accepted, verification continues 1522

with the checking of the rules in all certificates and those supplied by the user, including sponsor certificate 1509. Otherwise, the transaction is rejected 1514. If verification continues, the  
5 recipient verifies 1522 the transaction against the rules in the CA certificate 1508, sponsor certificate 1509 (and in any other certificates associated with this transaction). If any of these rules are not satisfied the transaction is rejected 1514, otherwise  
10 verification of the transaction continues with the verification of the transaction with respect to the user-supplied rules 1504. Only if the transaction satisfies the user provided rules 1504 is it accepted 1526, otherwise it is rejected 1514.

15 The user-supplied rules 1504 can be any combinations of the rules known to the system, including, but not limited to co-signature requirements, temporal limits, transaction amount limits, confirm-to requirements and the like.

20 In some environments users may create sets of rules or default rules for themselves for use with particular types of users or transactions. These sets of rules or defaults may be automatically attached to all transactions from those types of users or  
25 transactions. For example, a user who is bank manager may determine (from experience) that for all transactions by new tellers that she countersigns, she is going to apply more restrictive rules than the bank requires. She would then store these rules in her  
30 system as a default for those kinds of transactions that she signs or countersigns.

One skilled in the art will appreciate that the present invention is typically practiced using electronic devices such as digital electronic computers

and the like, and that the certificates, transactions, messages, signatures and the like are digital electronic signals generated by the electronic devices and transmitted between the electronic devices.

5           Thus, a method for securely using digital signatures in a commercial cryptographic system is provided. One skilled in the art will appreciate that the present invention can be practiced by other than the described embodiments, which are presented for  
10           purposes of illustration and not limitation, and the present invention is limited only by the claims that follow.

What is claimed is:

1. In a cryptographic system wherein a certifying authority issues digital certificates  
5 identifying users of said system, said digital certificates being digitally signed with a private key of said certifying authority to form a digital signature and requiring a public key of said certifying authority in order to verify said digital signature,  
10 and wherein a user transaction in said cryptographic system requires verification by a recipient of said user transaction, said verification based on information in said digital certificates and requiring said public key, a method of controlling access to said  
15 public key comprising the steps of:  
    denying access to said public key;  
    providing said recipient with at least one message containing rules of said system, said rules including maintaining secrecy of said public key;  
20      by said recipient, digitally signing said at least one document, by which said recipient agrees to said rules; and  
    in response to said digital signing, permitting said recipient to utilize said public key.  
25
2. A method as in claim 1 wherein said step of providing includes the step of providing said recipient with a secure device containing said public key,  
30      wherein said public key cannot be obtained from said  
    secure device.
3. A method of enforcing a security policy in a cryptographic system, said policy requiring controlling



access to a public key, said method comprising the steps of:

denying access to said public key;  
providing a recipient with a message containing  
5 rules of said cryptographic system, said rules  
including maintaining secrecy of said public key;  
by said recipient, digitally signing said  
document, by which said recipient agrees to said rules;  
in response to said digitally signing, permitting  
10 said recipient to utilize public key.

4. A method of enforcing a security policy in a cryptographic system, said policy requiring controlling access to a public key, said method comprising the  
15 steps of:

providing a recipient with a document containing rules of said system and with a secure device containing an inactive form of said public key, wherein said public key cannot be obtained from said device;  
20 by said recipient, digitally signing said document;  
in response to said digital signing, activating said public key in said secure device.

5. A method of enforcing a security policy in a cryptographic system, said policy requiring controlling access to a public key of a certifying authority, said method comprising the steps of:

by said certifying authority,  
30 providing a user with a message containing rules of said system and with a secure device containing an inactive form of said public key, wherein said public key cannot be obtained from said device;

by said user,  
indicating an intent to follow said rules,  
said indicating including the steps of:  
hashing said message to obtain a hashed  
5 document;  
digitally signing said hashed document to  
form a digital agreement; and  
returning said digital agreement to said  
certifying authority;  
10 in response to said indicating by said user,  
by said certifying authority, activating said  
public key in said secure device.

6. A method as in any one of claims 1-5 wherein  
15 each user of the system has a private key, and wherein  
said rules include at least one of rules requiring  
payment to a third party upon:  
each use of said public key;  
each use of a user's private key;  
20 each certification of a certificate's status; and  
each confirm-to transaction by a user.

7. A method as in any one of claims 1-5 wherein  
said rules include rules to pay for use by said  
25 recipient of intellectual property used in creating or  
operating the system.

8. A method as in claim 1 wherein said user  
transaction is invalid until said step of digital  
30 signing is performed.

9. A method as in claim 1 further comprising the  
steps of:

in response to said signing by said recipient,  
said certifying authority accepting a transaction from  
said recipient, said transaction based on said user  
transaction.

5

10. In a cryptographic system wherein a  
certifying authority issues digital certificates  
identifying users of said system, said digital  
certificates being digitally signed with a private key  
of said certifying authority to form a digital  
signature and requiring a public key of said certifying  
authority in order to verify said digital signature,  
and wherein a user transaction in said cryptographic  
system requires verification by a recipient of said  
user transaction, said verification based on  
information in said digital certificates and requiring  
said public key, a method of controlling access to said  
public key comprising the steps of:

providing said recipient with a secure device  
containing an inactive form of said public key, wherein  
said public key cannot be obtained from said secure  
device;

in response to a predetermined transaction with  
said secure device, activating said inactive public key  
is said secure device, said predetermined transaction  
including information from the secure device  
identifying operational capabilities of the secure  
device and uniquely identifying said secure device and  
further including information uniquely binding said  
recipient to said predetermined transaction.

11. In a cryptographic system wherein a  
certifying authority issues digital certificates  
identifying users of said system, said digital

certificates being digitally signed with a private key of said certifying authority to form a digital signature and requiring a public key of said certifying authority in order to verify said digital signature, and wherein a user transaction in said cryptographic system requires verification by a recipient of said user transaction, said verification based on information in said digital certificates and requiring said public key, a method of controlling access to said public key comprising the steps of:

5 providing said recipient with a secure device;  
in response to a predetermined transaction with said secure device, transferring said public key to said secure device, said predetermined transaction including information from the secure device  
15 identifying operational capabilities of the secure device and uniquely identifying said secure device and further including information uniquely binding said recipient to said predetermined transaction, wherein  
20 said public key cannot be obtained from said secure device.

12. A method as in one of claims 10 and 11 wherein said public key in said secure device becomes inactive after a predetermined time period, said method further comprising the steps of:

after said public key in said device becomes inactive,  
in response to another predetermined transaction  
30 with said secure device, activating said inactive public key in said secure device, said other predetermined transaction including information from the secure device identifying operational capabilities of the secure device and further including information

uniquely binding said recipient to said other predetermined transaction.

5           13. A method of enforcing a policy in a cryptographic communication system comprising the steps of:

          forming a digital message by a user;  
          combining with said message at least one user rule;

10           forming a digital user signature based on said digital message, said at least one user rule and a private key of said user;

          combining said digital message, said at least one user rule and said digital user signature to form a  
15           digital user transaction; and

          combining with said digital user transaction a digital identifying certificate issued by a certifying authority, said identifying certificate having a plurality of digital fields, at least one of said  
20           fields identifying said user, wherein

          said at least one user rule specifying conditions under which said digital message transaction is valid.

25           14. A method as in claim 13, further comprising the step of:

          combining with said digital transaction a digital authorizing certificate, separate from said identifying certificate and issued by a sponsor of said user for authorizing transactions by said user.

30

          15. A method of enforcing a policy in a cryptographic communication system comprising the steps of:

receiving a digital user transaction including a digital message, at least one user rule specifying conditions under which said transaction is valid and a digital user signature based on said digital message,  
5 said at least one user rule and on a private key of a user;

receiving a digital identifying certificate issued by a certifying authority and having a plurality of digital fields, at least one of said fields identifying  
10 said user;

verifying said transaction based on information in said certificate and in said at least one user rule;  
and

15 accepting said transaction based on said outcome of said verifying.

16. A method as in claim 15, further comprising the step of:

receiving a digital authorizing certificate,  
20 separate from said identifying certificate and issued by a sponsor of said user and authorizing transactions by said user; and wherein said step of verifying includes the step of:

25 verifying said transaction based on information in said authorizing certificate.

17. A method as in any one of claims 13-16 wherein said at least one user rule includes at least one of:

- (a) allowed document types of said transaction;
- (b) allowed locations at which transactions can be formed;
- (c) allowed times at which transactions may be formed;

- (d) a time period within which said signature is valid;
- (e) a monetary limit for said transaction; and
- (f) co-signer requirements for said transaction.

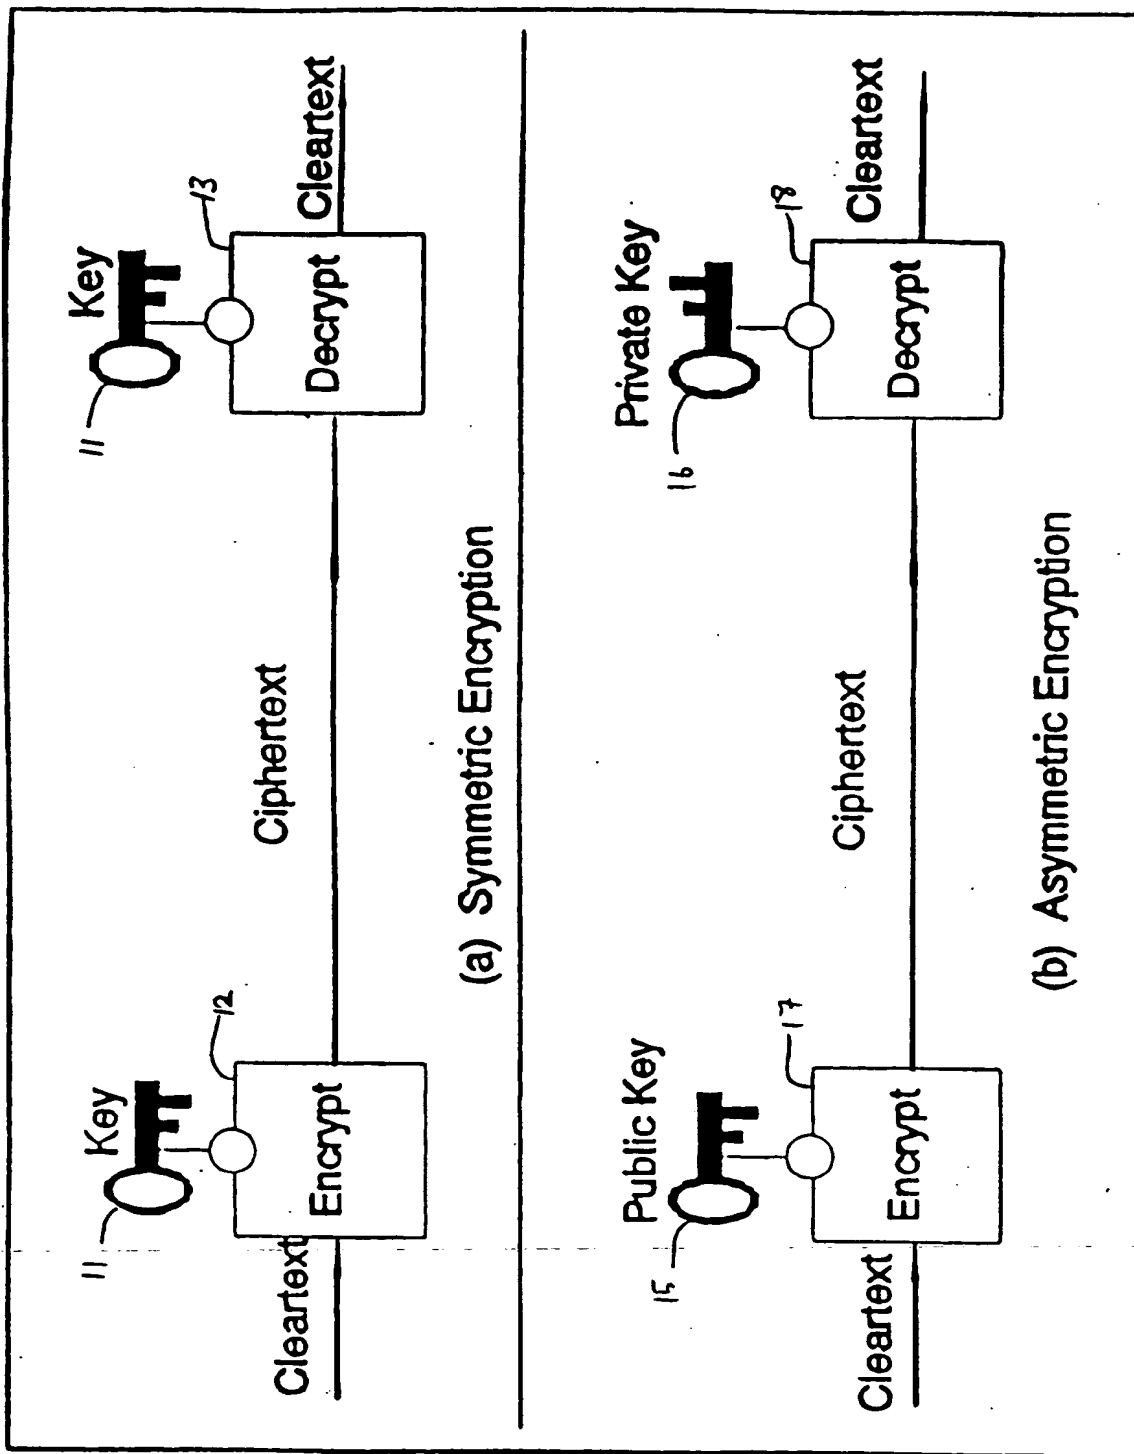


Figure 1. Symmetric and Asymmetric Encryption



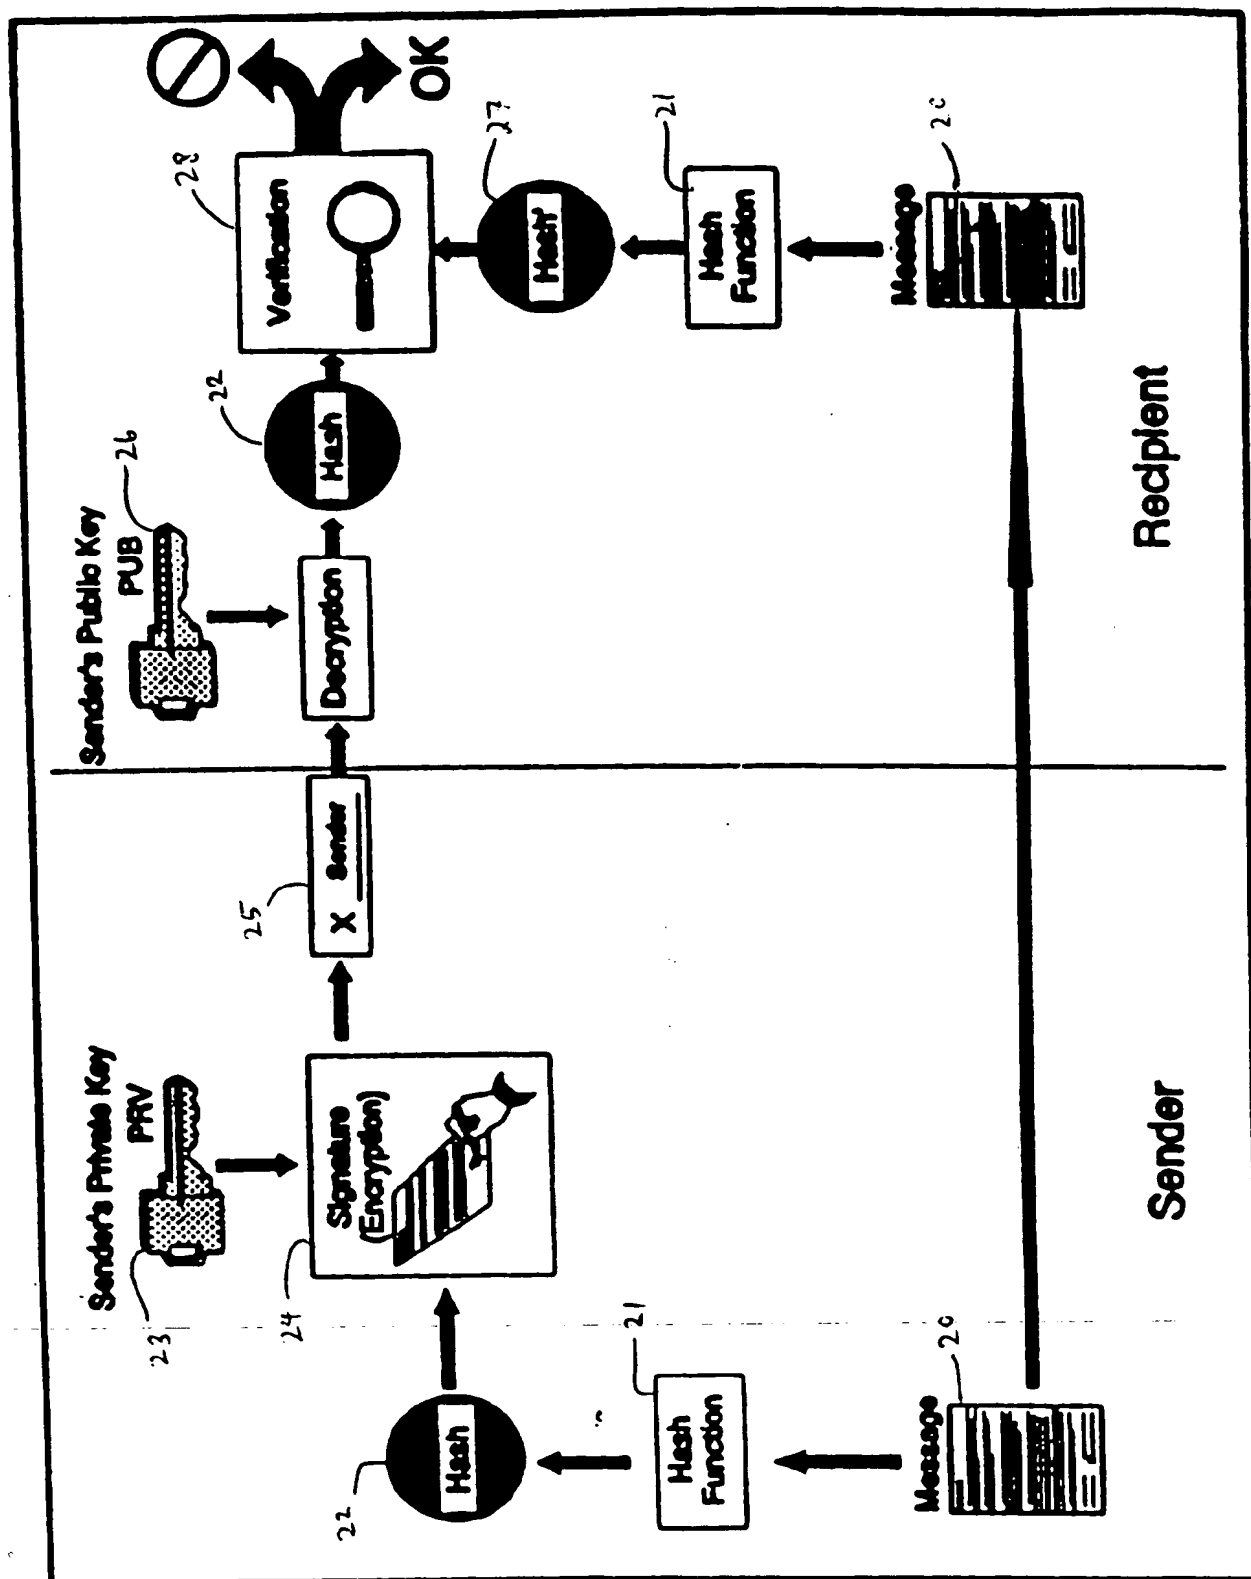


Figure 2. Digital Signatures

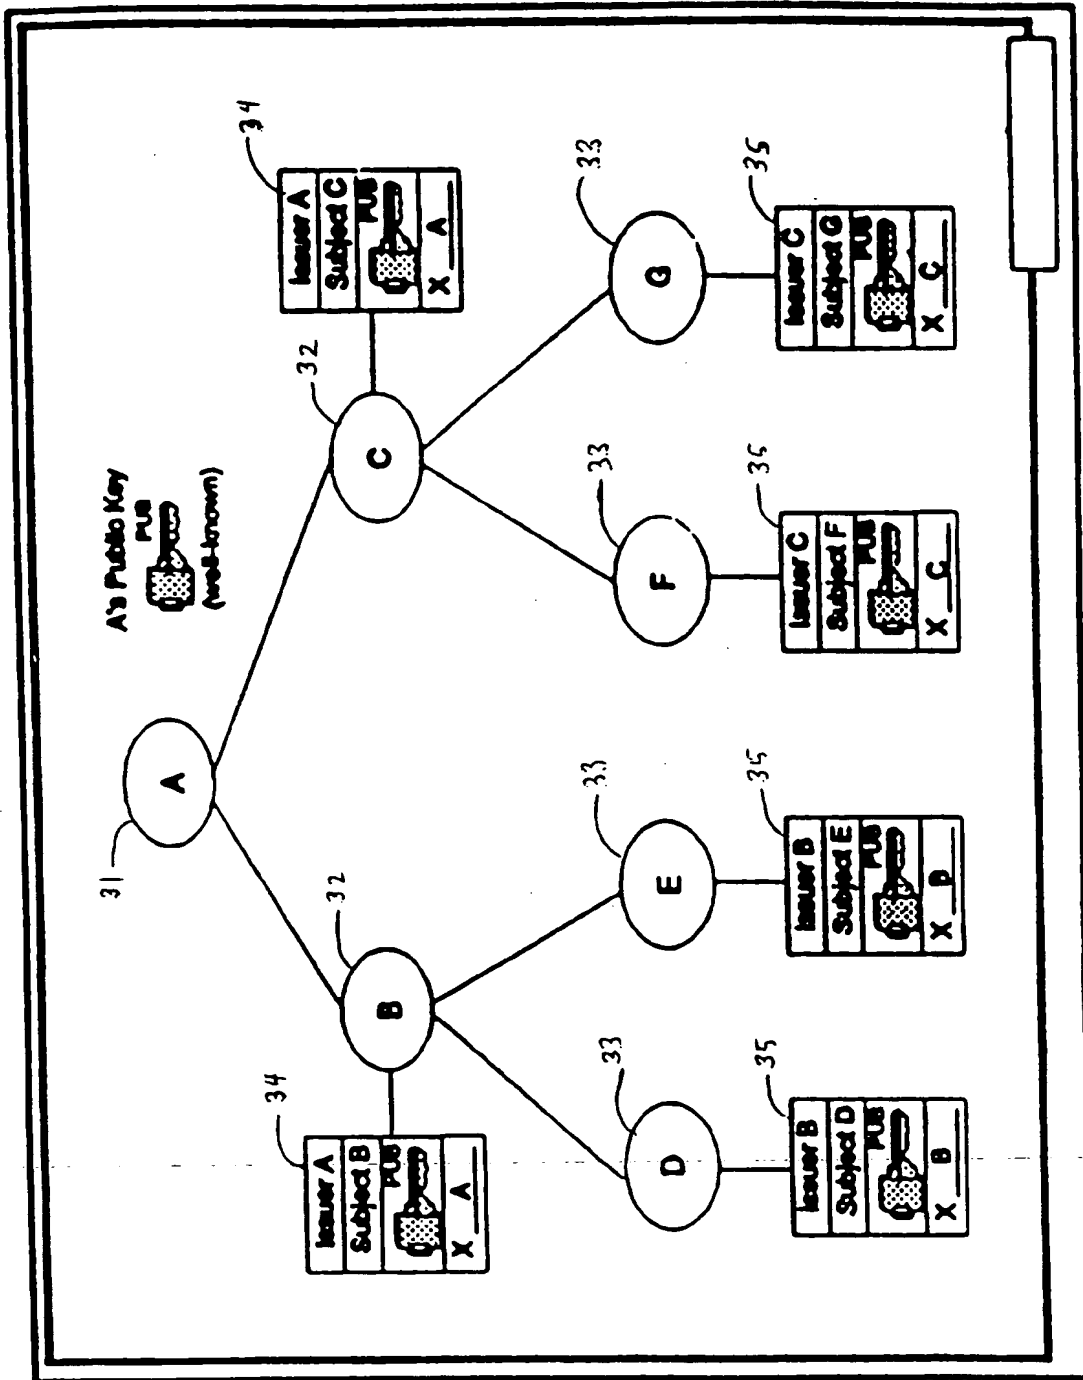


Figure 3. CA Hierarchy



### Figure 4. Directory Information Tree

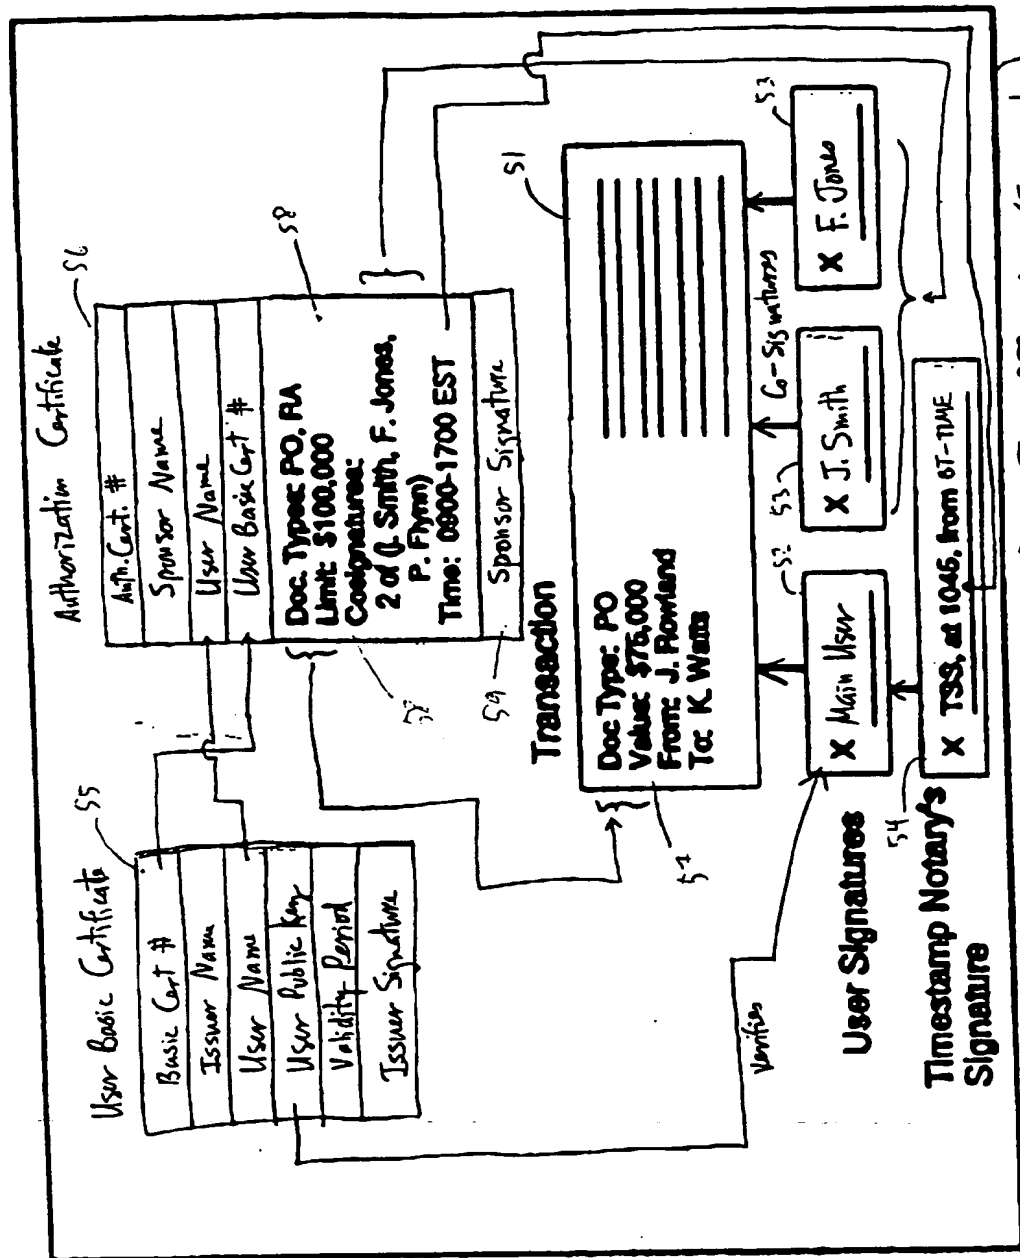


Figure 5. Authorization Certificate (Example)

Figure 6. Verifier Enforcement of Monetary Value Restriction (Prior Art)

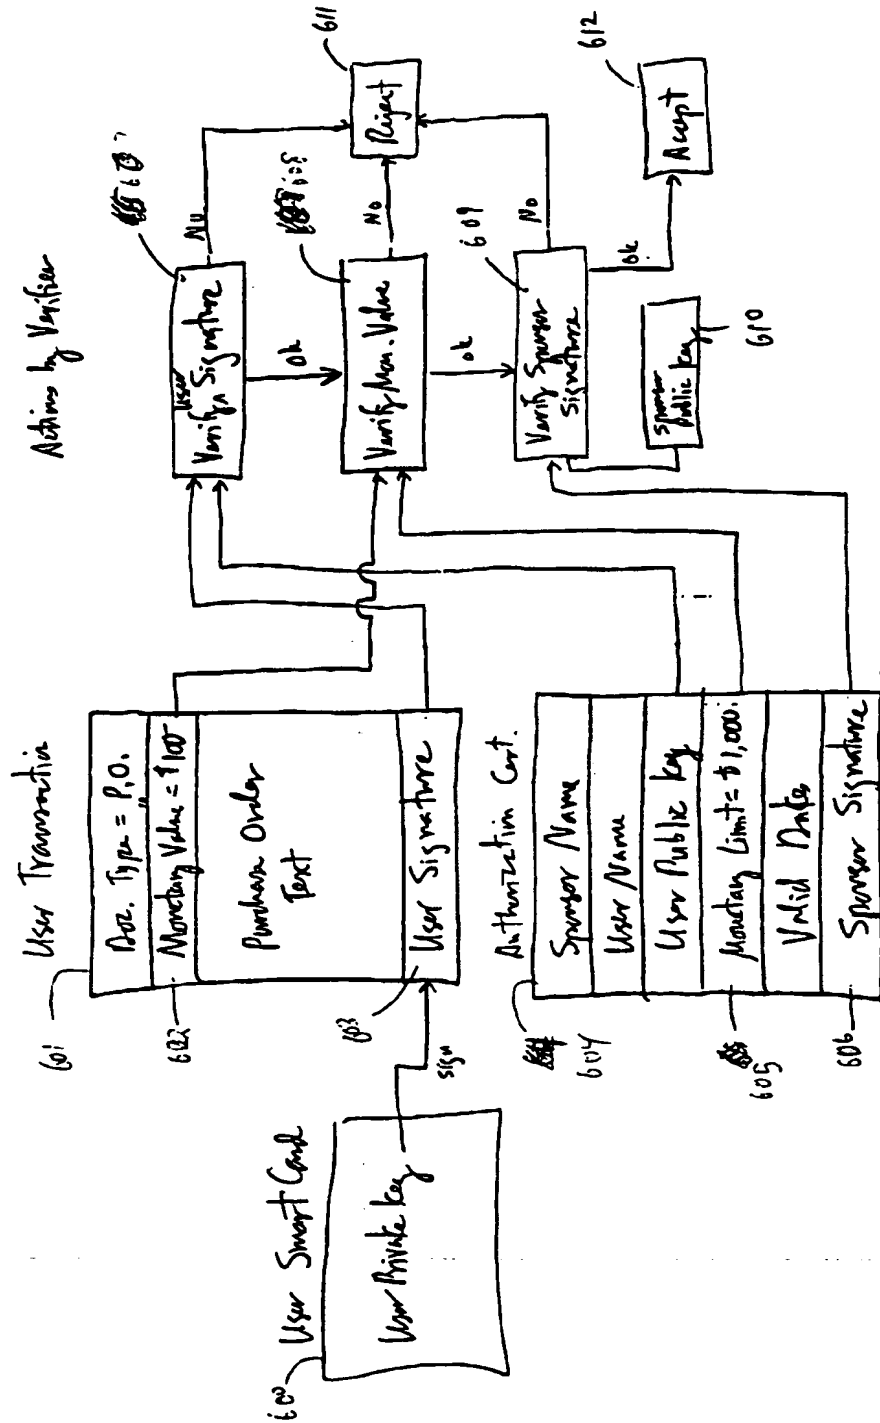


Figure 7. Verifier Enforcement of Co-Signature Requirement (Prior Art)

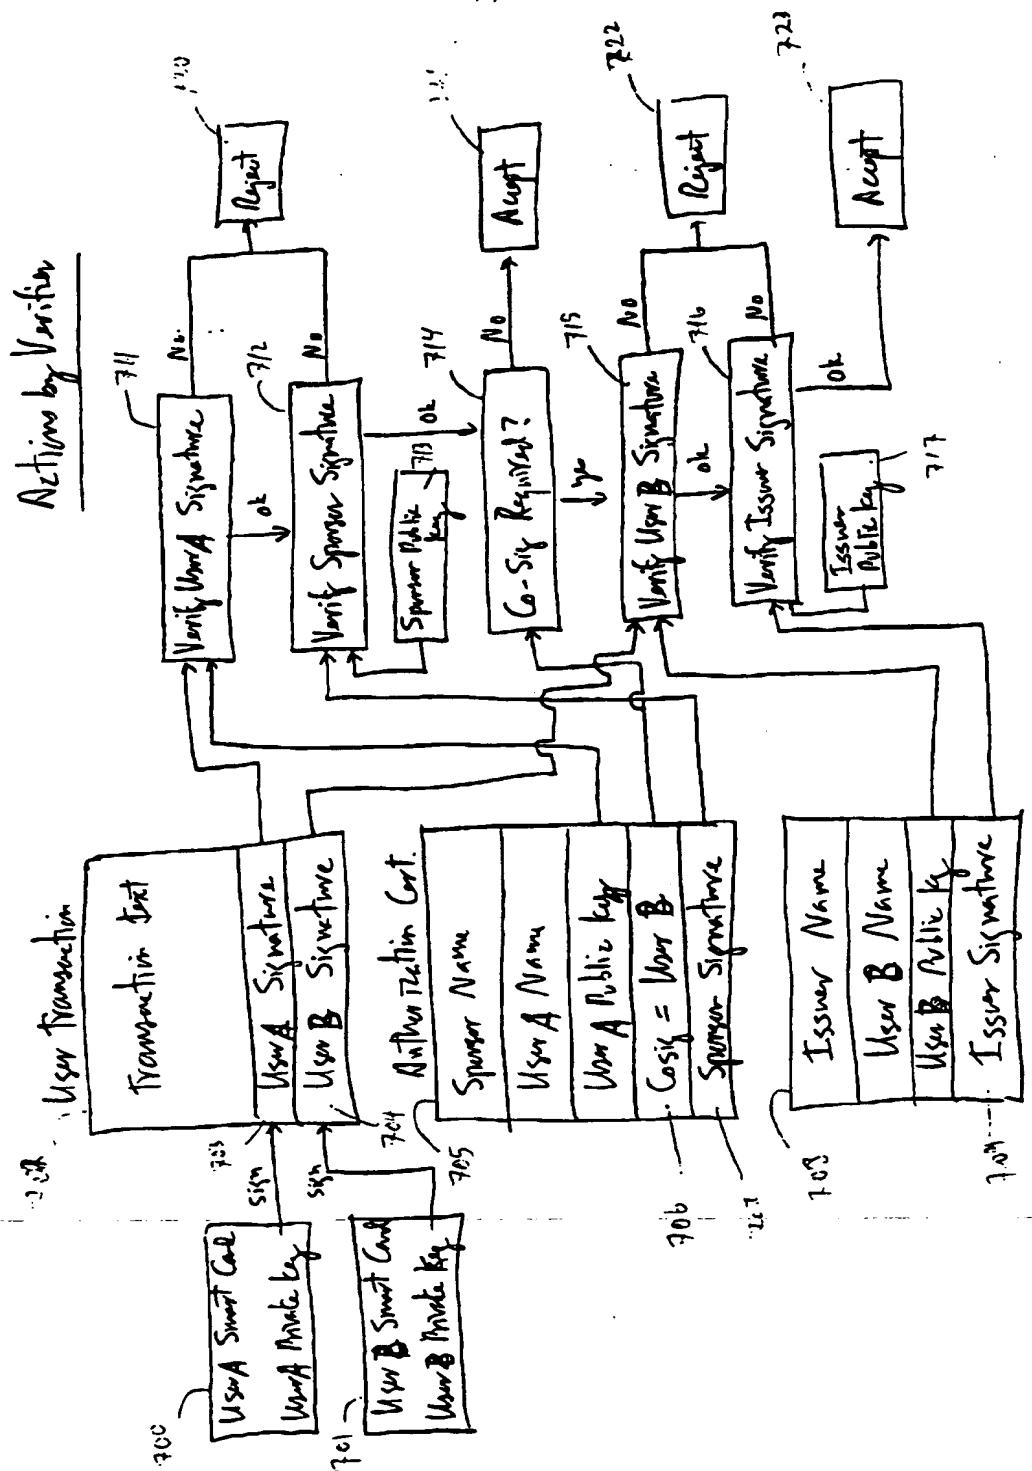


Figure 8. Verifier Enforcement of Document Type Restriction

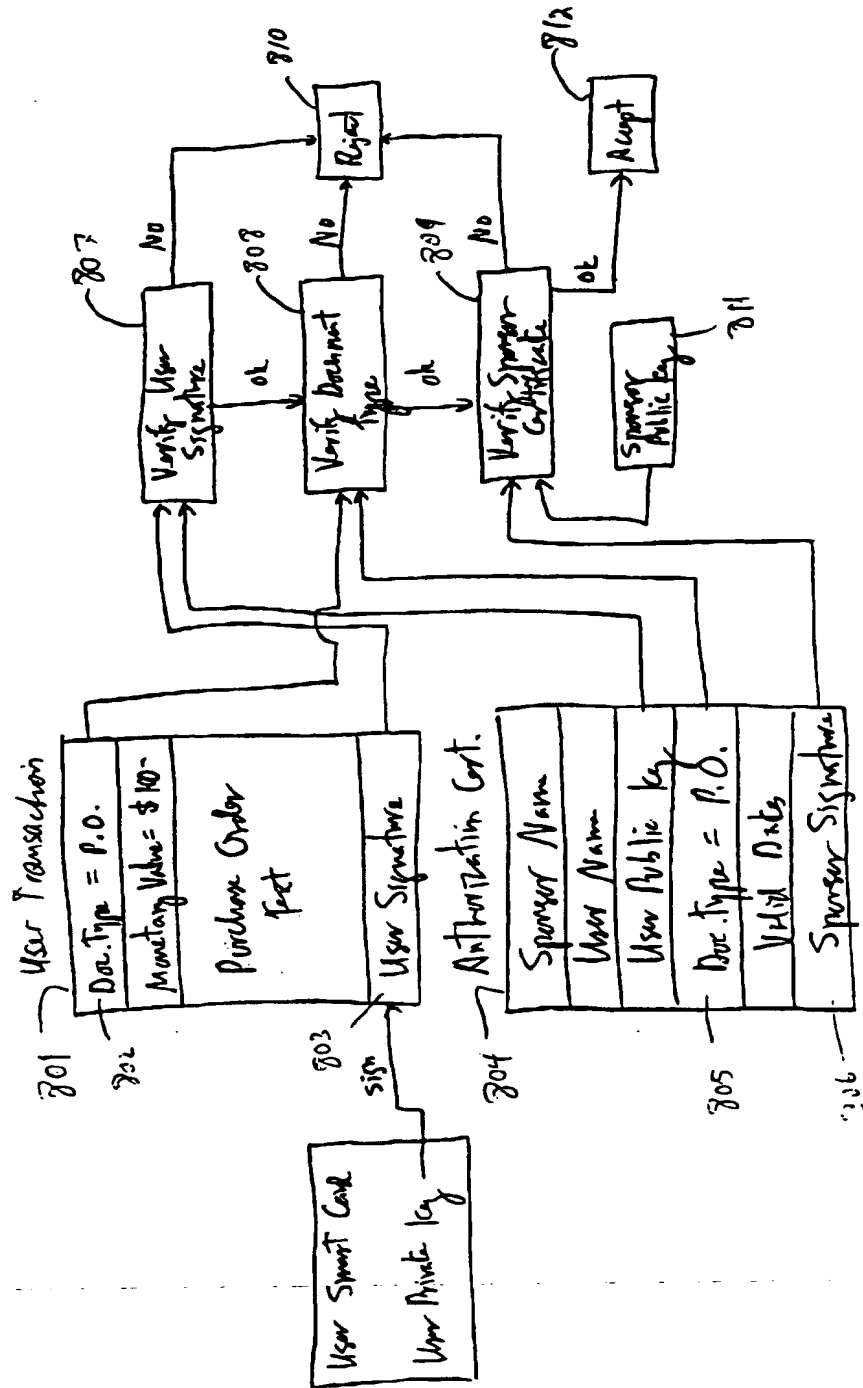


Fig. 5. Verifier Enforcement of Geographical & Temporal Controls

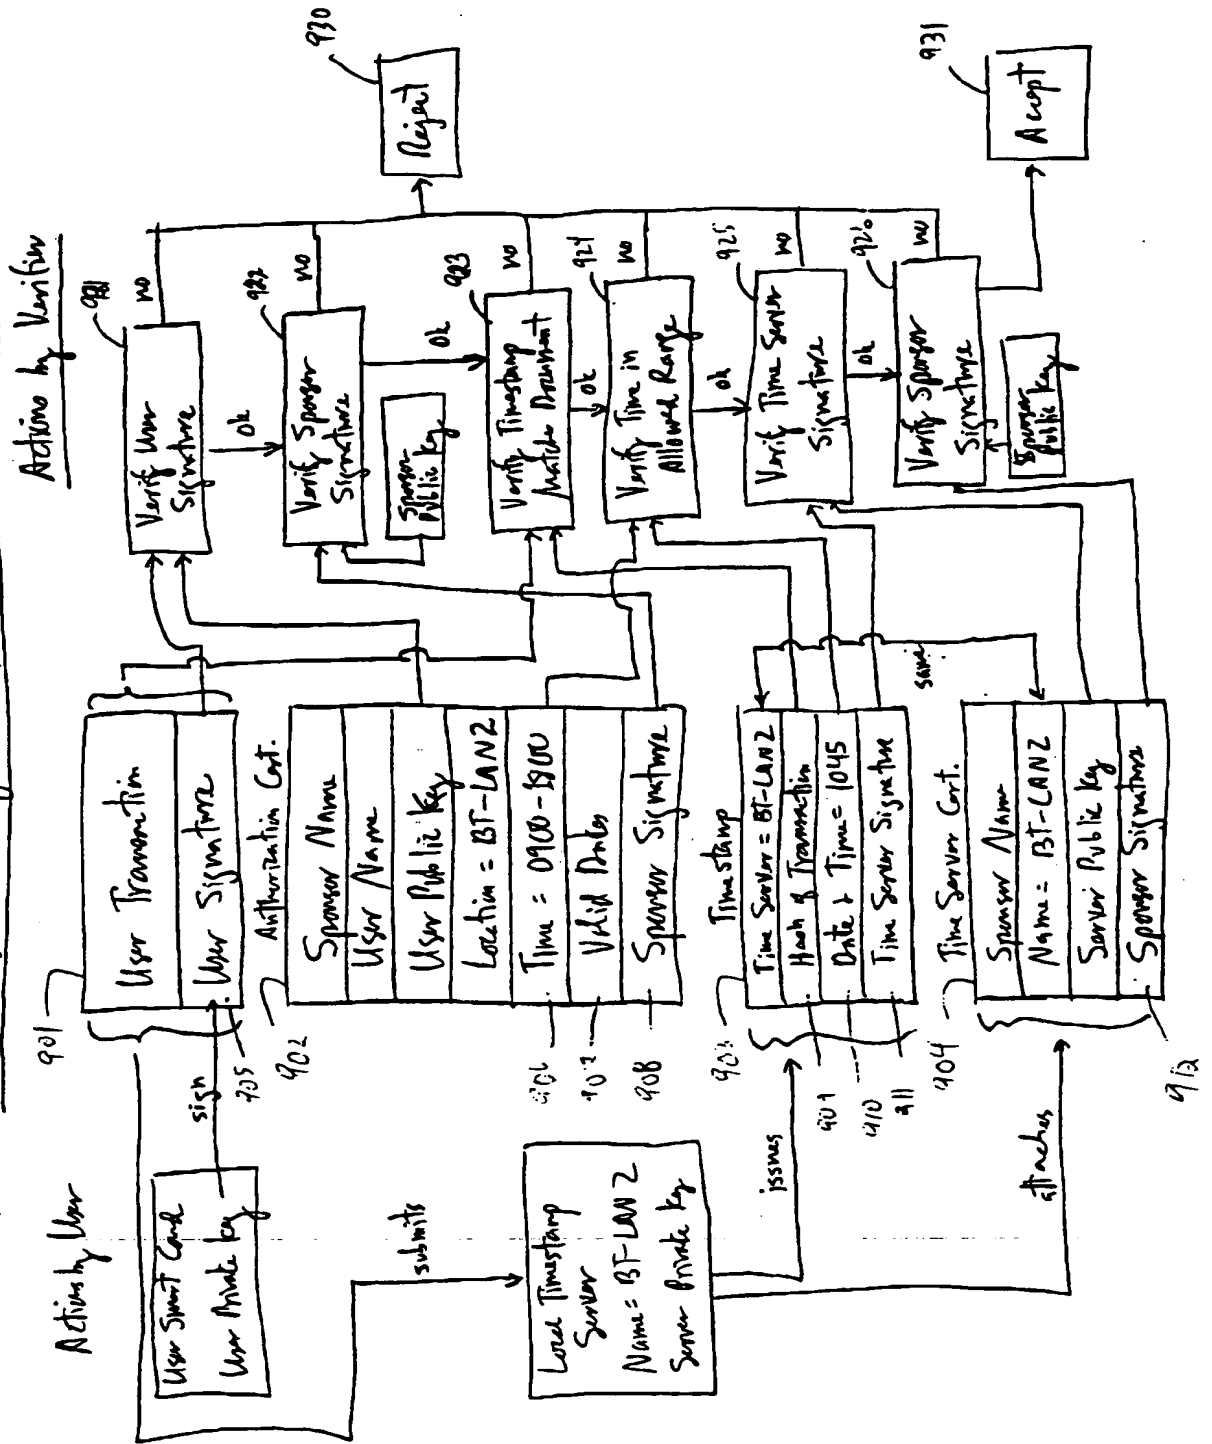




Figure 10. Verification Enforcement of Maximum Age of Sender's Signature



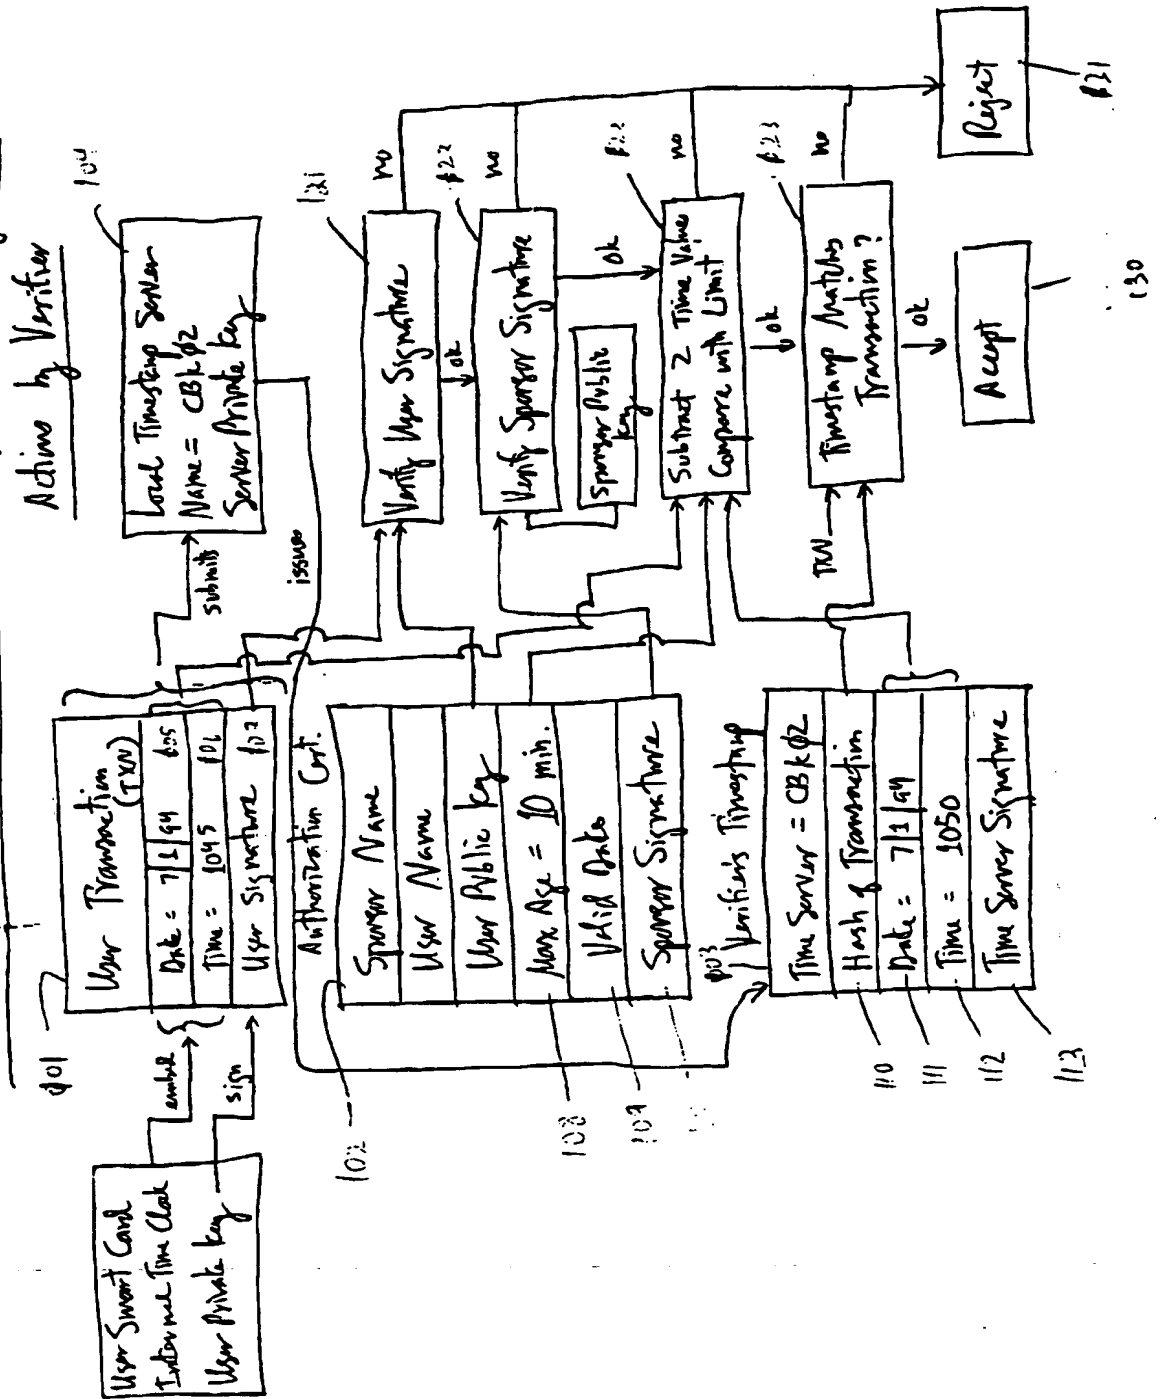



Figure 11. Sponsor Enforcement of Pre-Approved Counterparty Restriction

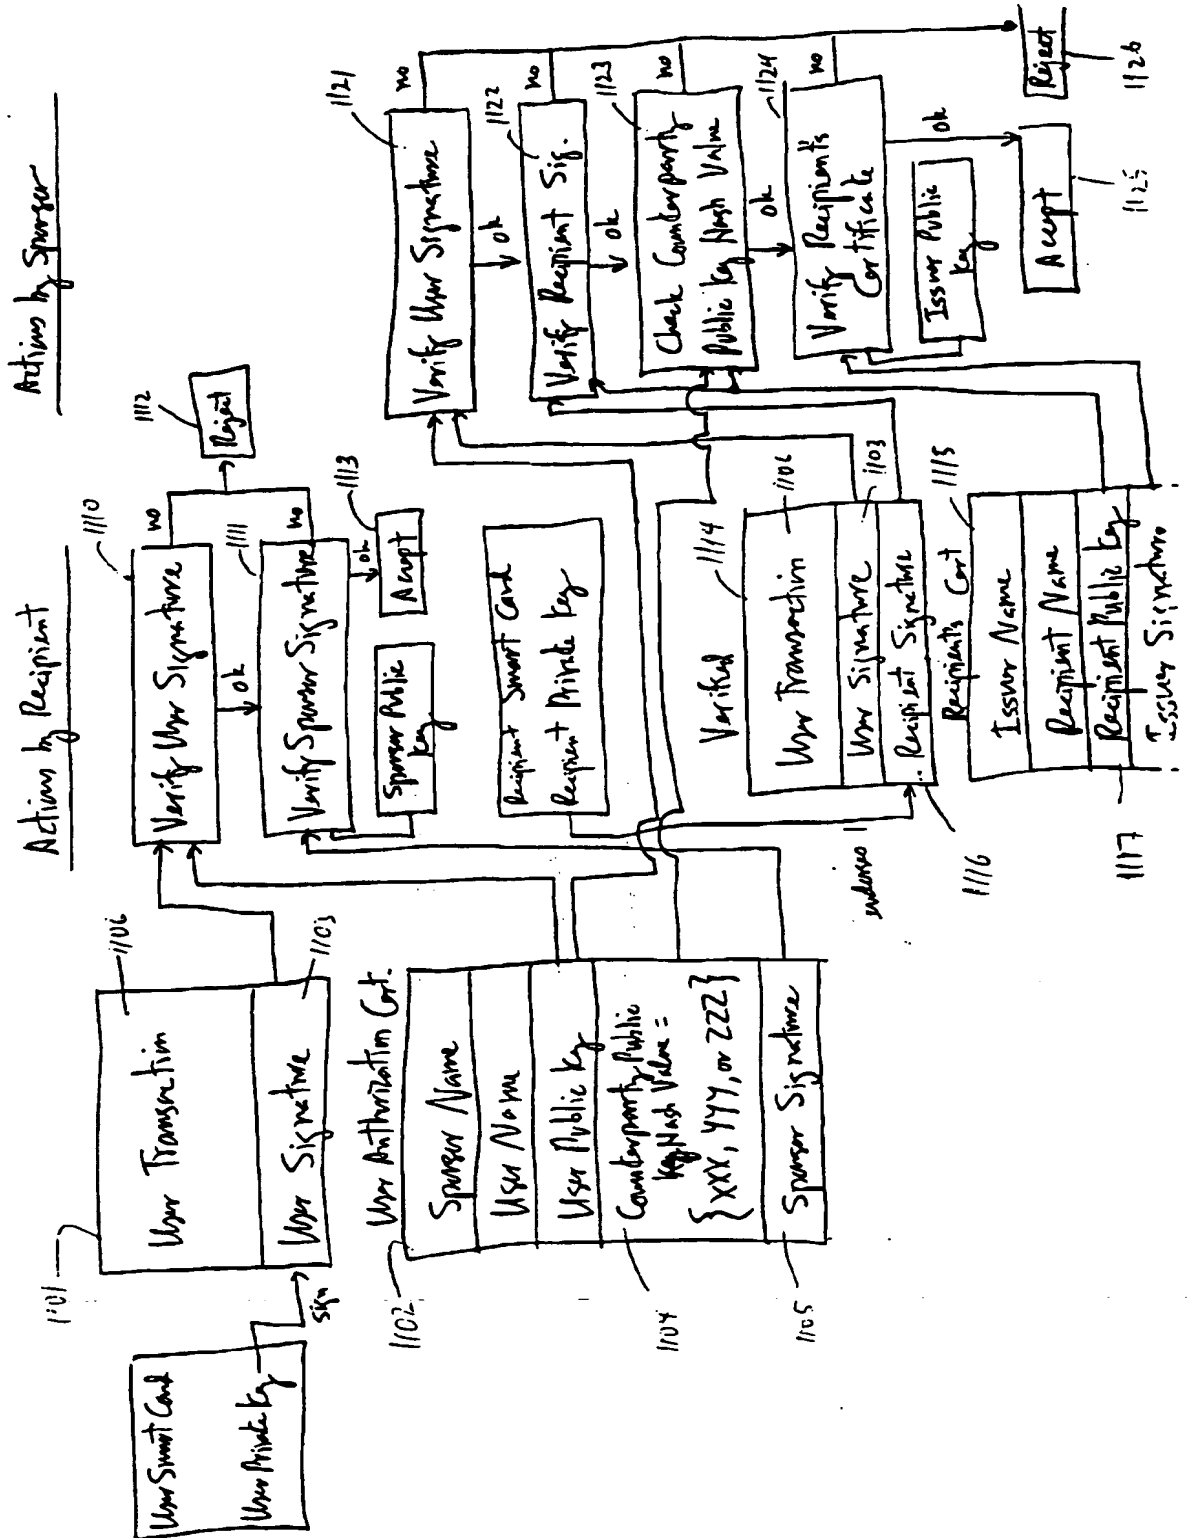

• • • • •

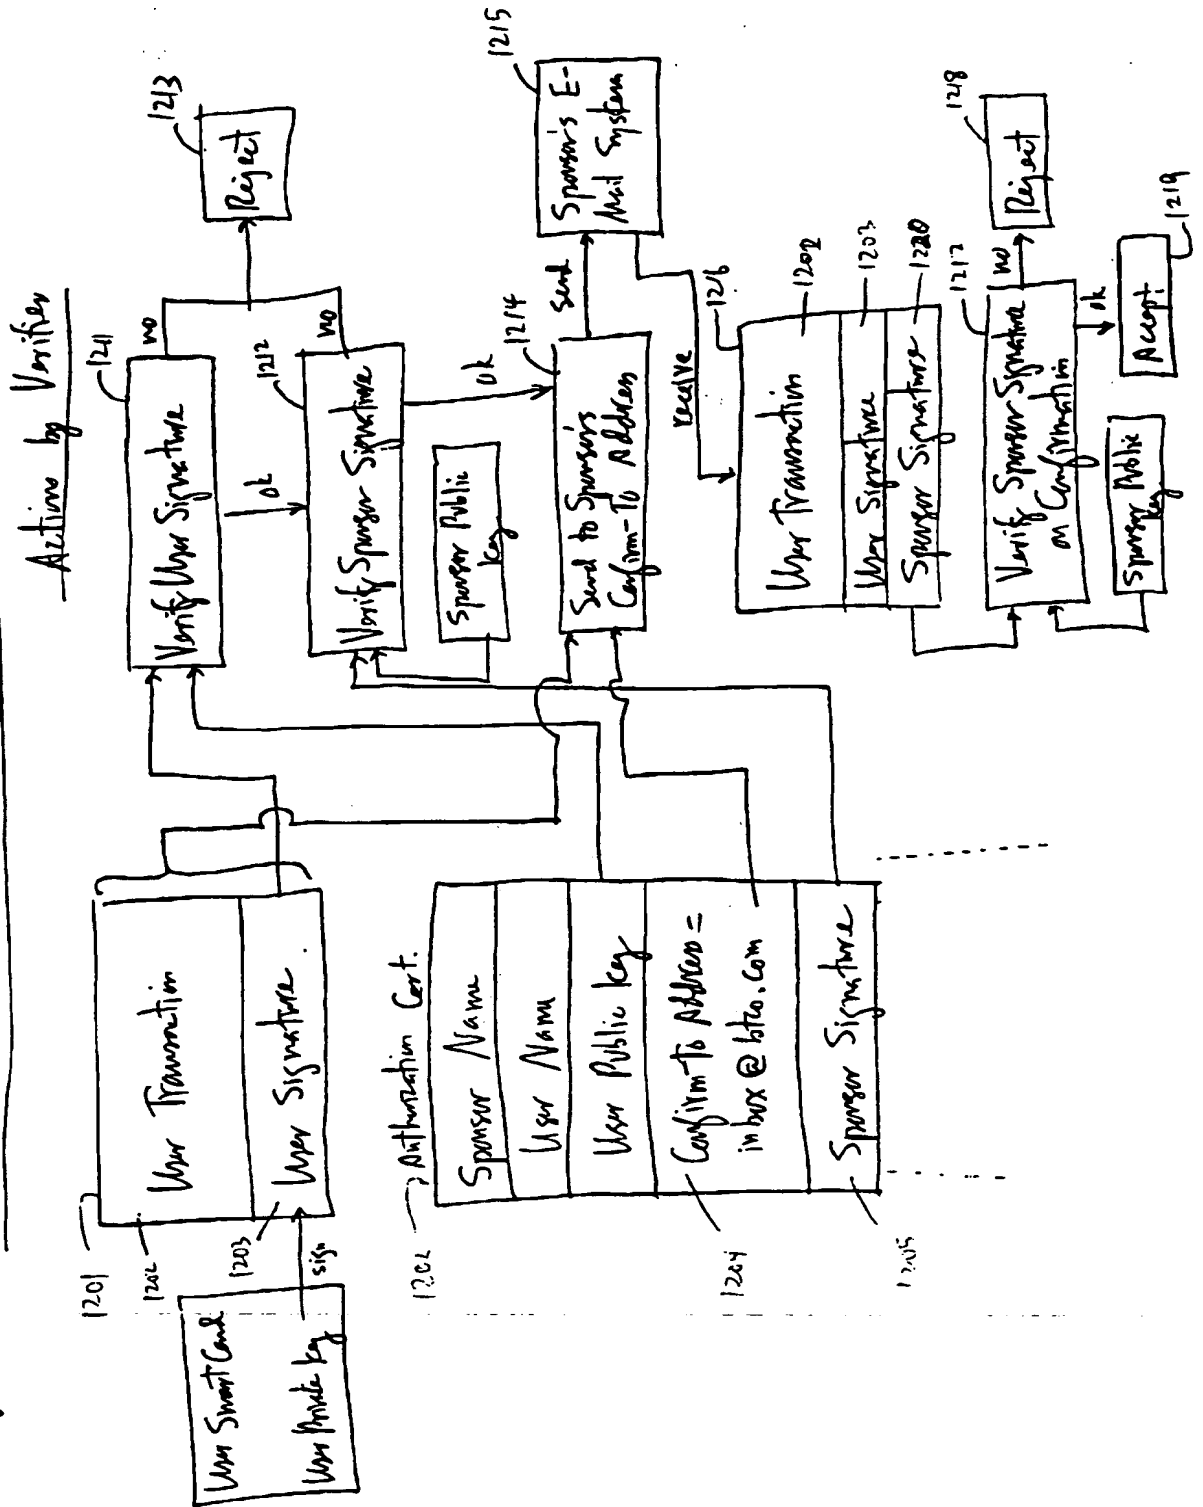

## Device's Certification of Key-Confinement + Non-Decryption

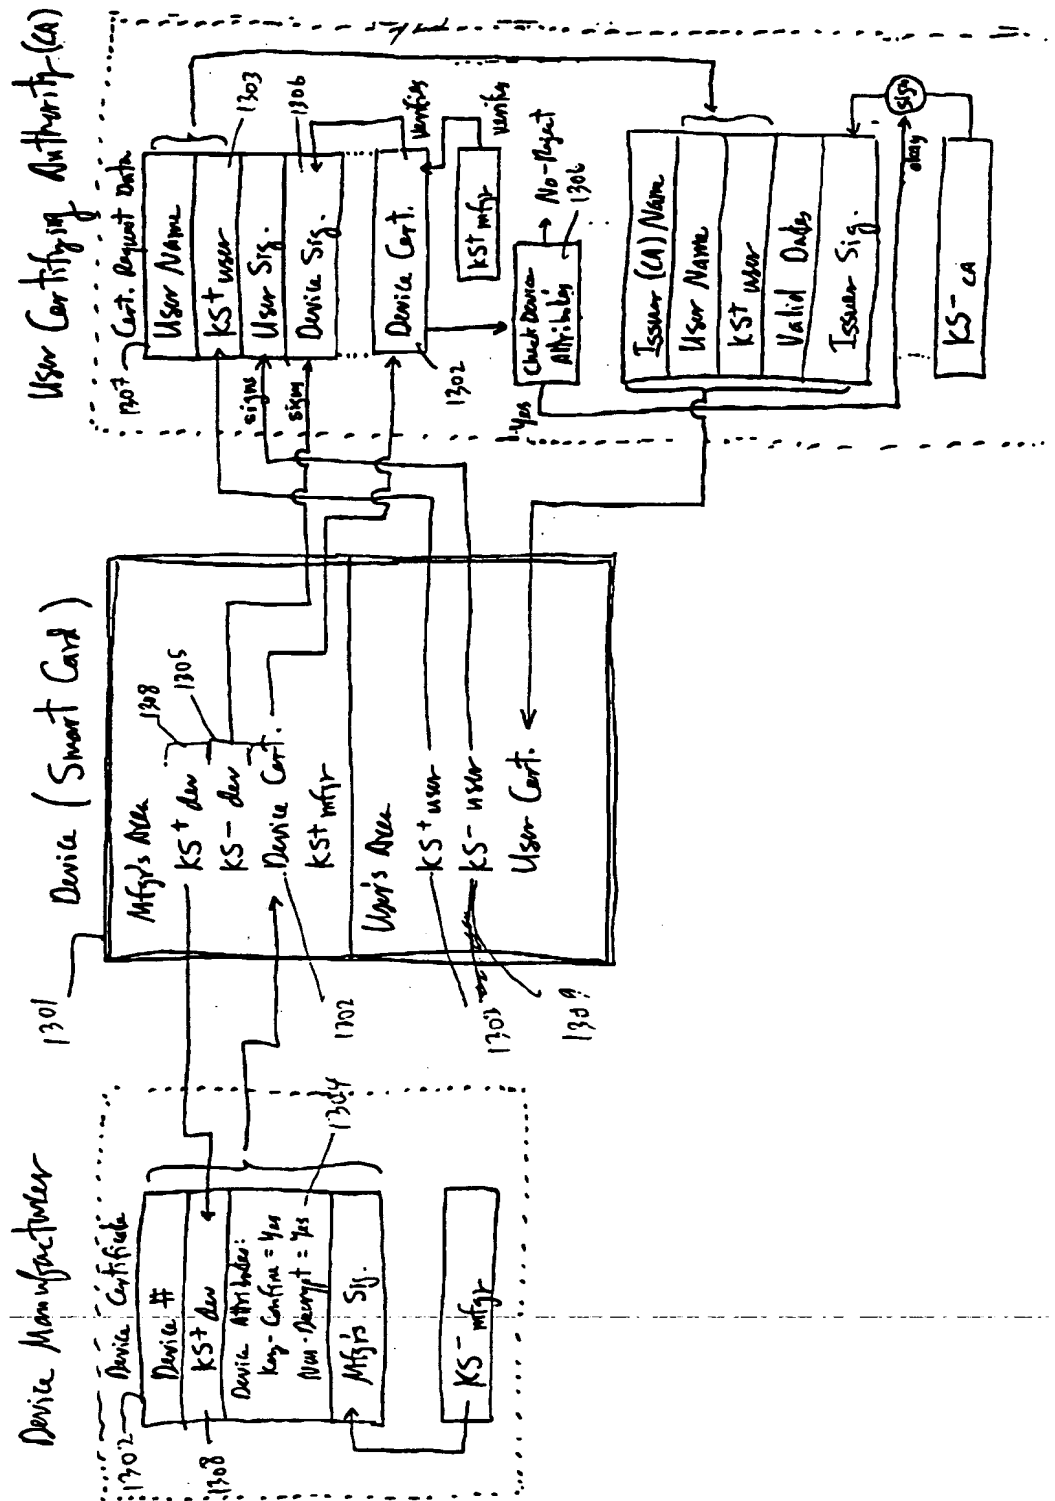

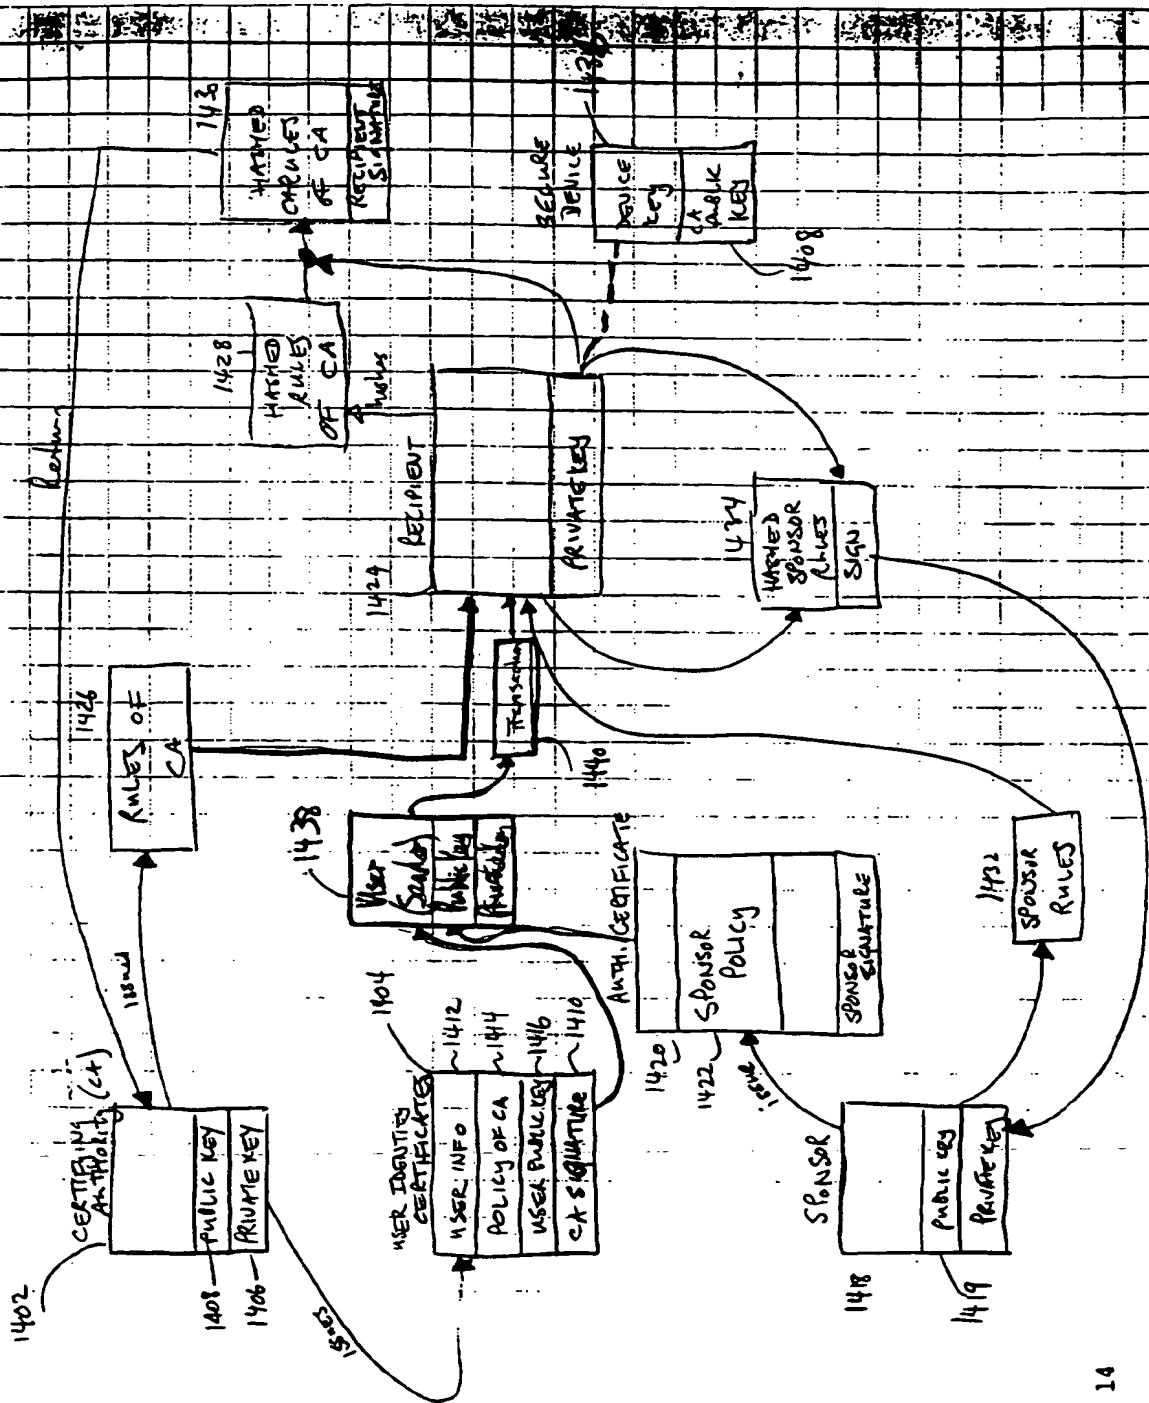


FIG. 14

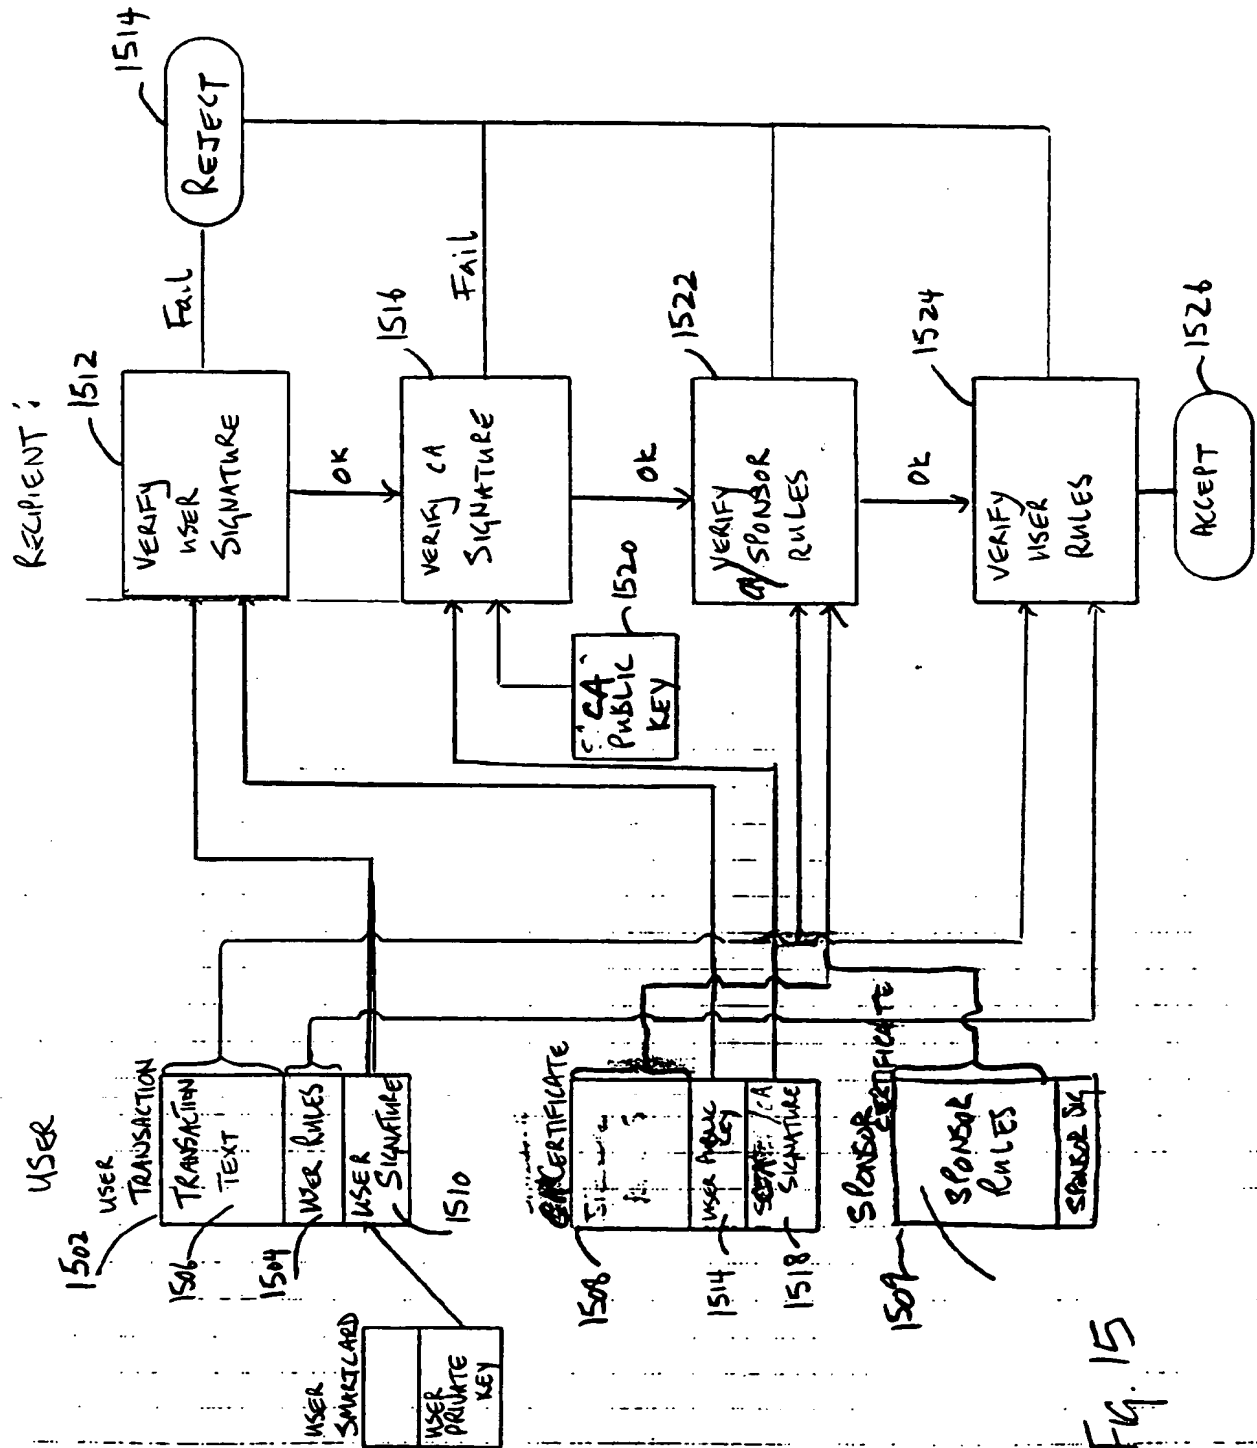


Fig. 15

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**